



超品光电
CHAMPION OPTOELECTRIC

ZHONGSHAN CHAMPION OPTOELECTRIC TECHNOLOGY CO.,LTD.


Datasheet- JIXIN Flood Light-B




PARAMETERS:

Model	Power	Dimension	Voltage	Lumens	Efficiency	LED Brand	LED Qty	Driver Brand	Material	CRI	CCT	PF	Life Span
ATGDJR001	20W	142*116*26mm	180-245V	2000LM	80LM/W	SMD 2835	25pcs	Liner DOB220V	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDJR002	30W	186*155*26mm	180-245V	3000LM	80LM/W	SMD 2835	45pcs	Liner DOB220V	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDJR003	50W	222*185*30mm	180-245V	5000LM	80LM/W	SMD 2835	72pcs	Liner DOB220V	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDJR004	100W	263*233*30mm	180-245V	10000LM	80LM/W	SMD 2835	144pcs	Liner DOB220V	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDJR005	150W	302*253*31mm	180-245V	15000LM	80LM/W	SMD 2835	196pcs	Liner DOB220V	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDJR006	200W	345*289*36mm	180-245V	20000LM	80LM/W	SMD 2835	289pcs	Liner DOB220V	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDJR007	250W	386*301*36mm	180-245V	20000LM	80LM/W	SMD 2835	289pcs	Liner DOB220V	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours

DIMENSIONS

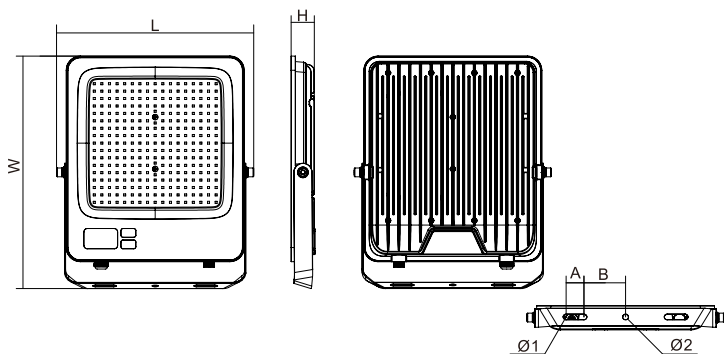

LIGHTING DISTRIBUTIONS



EXPLODE



APPLICATIONS

