



超品光电
CHAMPION OPTOELECTRIC

ZHONGSHAN CHAMPION OPTOELECTRIC TECHNOLOGY CO.,LTD.


Datasheet- jili Flood Light-C




PARAMETERS:

Model	Power	Dimension	Voltage	Lumens	Efficiency	LED Brand	LED Qty	Driver Brand	Material	CRI	CCT	PF	Life Span
ATGDAC001	20W	151*169*28mm	200-245VAC	1600LM	80LM/W	MBT-2835	36pcs	AC220V-Linear	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDAC002	30W	151*169*28mm	200-245VAC	2400LM	80LM/W	MBT-2835	46pcs	AC220V-Linear	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDAC003	50W	179*198*28mm	200-245VAC	4000LM	80LM/W	MBT-2835	72pcs	AC220V-Linear	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDAC004	100W	232*265*31mm	200-245VAC	8000LM	80LM/W	MBT-2835	144pcs	AC220V-Linear	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDAC005	150W	267*300*33mm	200-245VAC	12000LM	80LM/W	MBT-2835	280pcs	AC220V-Linear	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDAC006	200W	288*338*35mm	200-245VAC	16000LM	80LM/W	MBT-2835	365pcs	AC220V-Linear	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDAC007	300W	391*484*43mm	200-245VAC	24000LM	80LM/W	MBT-2835	576pcs	AC220V-Linear	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours
ATGDAC008	400W	391*484*43mm	200-245VAC	32000LM	80LM/W	MBT-2835	576pcs	AC220V-Linear	Aluminum	>70	3000K/4000K/5000K/5700K/6500K	>0.95	30,000 Hours


DIMENSIONS

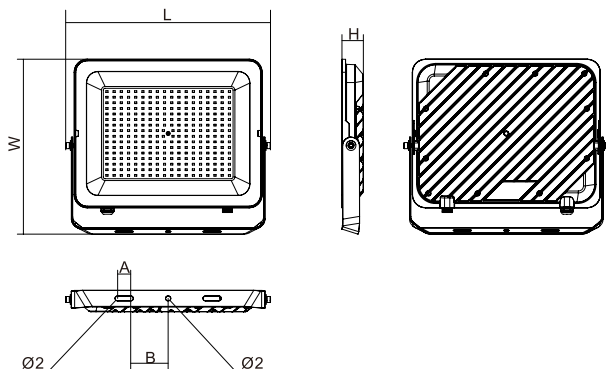

LIGHTING DISTRIBUTIONS



EXPLODE

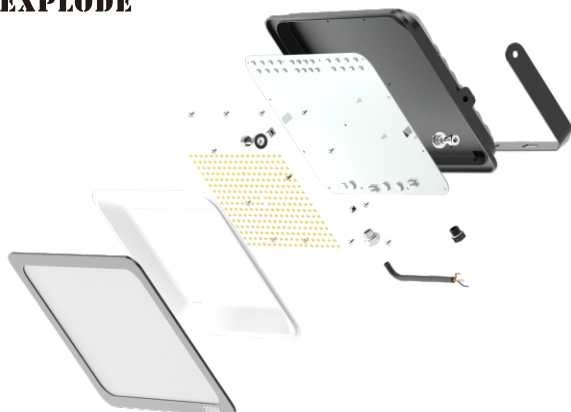

APPLICATIONS

