




功率	ZR-B-BY001	ZR-B-BY002	ZR-B-BY003	ZR-B-BY002	ZR-B-BY001	ZR-B-BY003
产品尺寸	L355*H65*Wa165mm	L280*H50*Wa150mm	L300*H70*Wa190mm	L260*H60*Wa215mm	L270*H70*Wa235mm	L350*H260*Wa115mm
包装尺寸	60*37.8*18.3cm	34*28*36cm	41*33.5*22cm	57*46*25.5cm	56.5*49.5*26.5cm	82*37*30cm
净重（KG）	16	10	7.5	9.6	16	15
毛重（KG）	17	11	8.5	10.5	17	17
功率因素	>0.95					
防护等级	IP66					
灯体颜色	>80					
防腐等级	WF1-WF2					
防爆标志	Ex demb IIC T5/T6 Gb/Ex tD A21 IP66 T95℃ /T80℃					
多种款式	单通款/双通款/双头款/吊链款					

防爆应急灯 / EX-Emergency light




黄色



产品特点:

- 1: ADC12压铸铝外壳，高效散热，高节能.
- 2: LED密封组件，IP66防水、防尘、防爆.
- 3: 外观材质有灰色/黄色.
- 4: 可选配多种款式，如吊链款，单头款，双头款等。

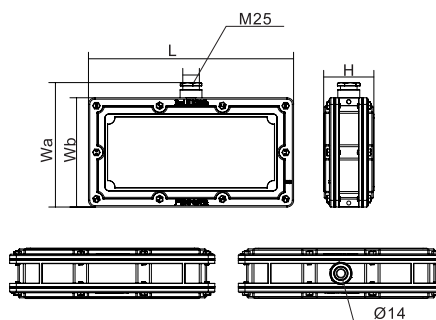

产品线条图

多种款式



吊链款



双头款



双通款