

场景应用

适用于加油站 石油 冶炼
煤矿 船舶等危化项目。






产品详情




型号	FCZM-FBD-3CMZ01	FCZM-FBD-3CMZ02	FCZM-FBD-3CMZ03	FCZM-FBD-3CMZ04	FCZM-FBD-3CMZ05	FCZM-FBD-3CMZ06
功率	100W	150W	200W	100W	150W	200W
产品尺寸	L340*W340*Hb120mm	L340*W340*Hb120mm	L340*W340*Hb120mm	L340*W340*Hb120mm	L340*W340*Hb120mm	L340*W340*Hb120mm
灯珠	266PCS	266PCS	266PCS	266PCS	266PCS	266PCS
支架孔距	Φa11*La60*Φb13*Lb29	Φa11*La60*Φb13*Lb29	Φa11*La60*Φb13*Lb29	Φa11*La60*Φb13*Lb29	Φa11*La60*Φb13*Lb29	Φa11*La60*Φb13*Lb29
芯片	EMC 3030芯片					
电压	宽压恒流电源 85-277V					
电源	飞利浦电源/台湾明纬电源/茂硕电源/崧盛电源					
灯珠数量及串并	7串38并					
EX	IICT6/IP66					
包装尺寸	390*390*180MM	390*390*180MM	390*390*180MM	390*390*180MM	390*390*180MM	390*390*180MM
净重	6KG	6.5KG	6.8KG	6KG	6.5KG	6.8KG
毛重	6.3KG	6.6KG	7KG	6.5KG	7KG	6.5KG
质保	三年	三年	三年	五年	五年	五年

3C款明装 / Surface Mounted

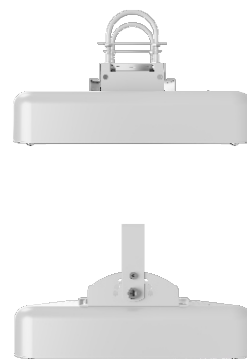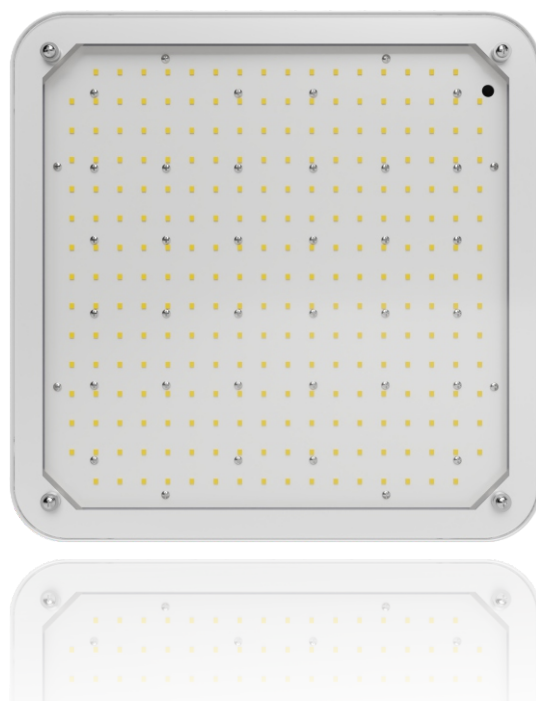

产品特点:

- 1: 灯体一体化设计, 高效散热
- 2: 防水防爆, 压铸铝外壳
- 3: 台湾明纬/飞利浦电源/茂硕电源/崧盛电源可选
- 4: 防腐防锈耐高温, 比同类型产品寿命更长
- 5: 可选配不同款式, 明装款, 支架款, 暗装款

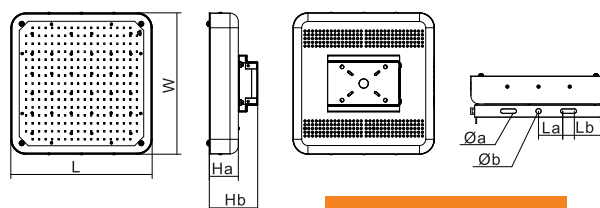

产品线条图

产品安装

