

APPLICATIONS:

Suitable for a variety of complex indoor and outdoor applications Lighting environment, such as workshops, warehouses, Tunnels, chemical plants, smelters Gas stations and other dangerous places.






Product Details






Model	FCZM-FBD-3CMZ01	FCZM-FBD-3CMZ02	FCZM-FBD-3CMZ03	FCZM-FBD-3CMZ04	FCZM-FBD-3CMZ05	FCZM-FBD-3CMZ06
Power	100W	150W	200W	100W	150W	200W
Net Size	L340*W340*Hb120mm	L340*W340*Hb120mm	L340*W340*Hb120mm	L340*W340*Hb120mm	L340*W340*Hb120mm	L340*W340*Hb120mm
Light Source	266PCS	266PCS	266PCS	266PCS	266PCS	266PCS
Bracket holes diagrams	Øa11*La60*Øb13*Lb29	Øa11*La60*Øb13*Lb29	Øa11*La60*Øb13*Lb29	Øa11*La60*Øb13*Lb29	Øa11*La60*Øb13*Lb29	Øa11*La60*Øb13*Lb29
Light Source	EMC 3030Lumileds					
Voltage	Wide voltage and constant current Driver 85-277V					
Driver	Philips / Taiwan MEAN WELL / MOSO/SOSEN					
Light Source Serial Parallel	7 in series and 38 in parallel					
EX grade	IICT6/IP66					
Package Size	390*390*180MM	390*390*180MM	390*390*180MM	390*390*180MM	390*390*180MM	390*390*180MM
N.W	6KG	6.5KG	6.8KG	6KG	6.5KG	6.8KG
G.W	6.3KG	6.6KG	7KG	6.5KG	7KG	6.5KG
Warranty	3 years	3 years	3 years	5 years	5 years	5 years

3C MODEL SURFACE MOUNTED

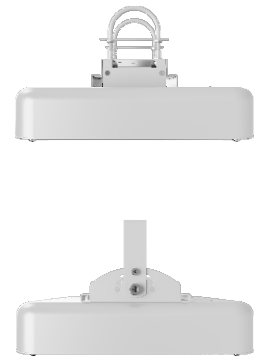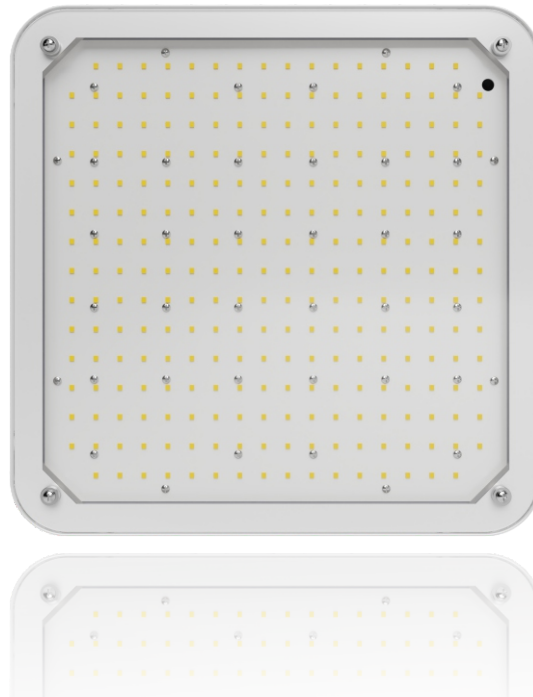

FEATURES:

- 1: Integrated lamp body design, efficient heat dissipation.
- 2: Waterproof and explosion-proof, die-casting aluminum shell.
- 3: Taiwan Meanwell/ Philips / MOSO / SOSEN optional.
- 4: Anti-corrosion, anti-rust and high temperature resistance, longer life than similar products.
- 5: Different styles are available, including exposed models, bracket models, and concealed models.



DIAGRAMS

INSTALLATIONS

