

# MILANO

## DIFFUSER

INTEGRATED STRUCTURE WITH  
SMD TECHNOLOGY.

DIFFUSER STRUCTURE MADE THE  
RAYS SOFT AND EVEN.





# MILANO.



## Parameters

Model	Power	Actual Power	Voltage	Size(mm)	Cut-out(mm)
HEC-PHY-7 DIFFUSER	7W	7W±10%	100~265V	Φ112*52	Φ75
HEC-PHY-12 DIFFUSER	12W	12W±10%	100~265V	Φ128*53	Φ95
HEC-PHY-18 DIFFUSER	18W	18W±10%	100~265V	Φ171*53	Φ138

Power Factor :0.55PF±10%  
 CCT:3000K/4000K/6500K  
 Material:Plastic+Aluminum  
 CRI:Ra>80  
 SMD Luminous: 120lm/w  
 Beam Angle: 120°

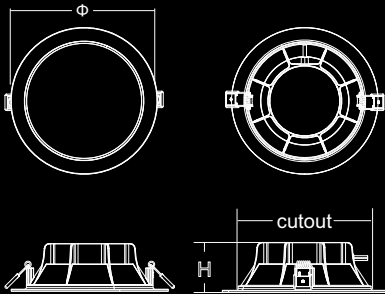

## APPLICATIONS:

WIDELY APPLICABLE TO INDOOR LOCATIONS, SUCH AS HOTELS, RESTAURANTS, OFFICES, SHOWROOMS, HOUSES AND SIMILAR PLACES.

## DETAILS

