


R_{IO}

SURFACE MOUNTED INSTALLATION.
NO NEED TO CUT HOLES IN YOUR
CEILING.





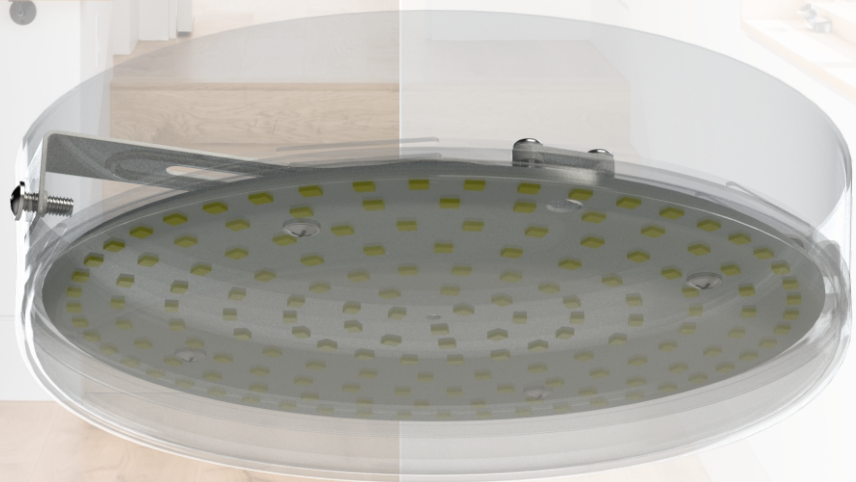

R₁₀





SURFACE MOUNTED

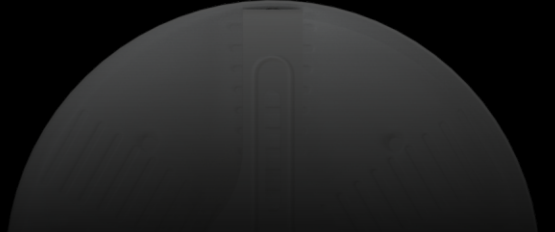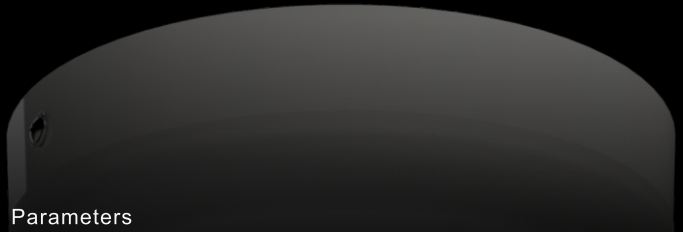

Parameters

Model	Power	Actual power	Voltage	Size(mm)
HEC-SMQ-18	18W	18W±10%	85-265V	123*43
HEC-SMQ-24	24W	24W±10%	85-265V	177*43
HEC-SMQ-36	36W	36W±10%	85-265V	230*43
HEC-SMQ-48	48W	48W±10%	85-265V	300*43

Power factor :0.55PF±10%
 CCT:3000K/4000K/6500K
 Material:Aluminum+Plastic
 CRI:Ra>70
 SMD Luminous:130lm/w
 Beam Angle:180°

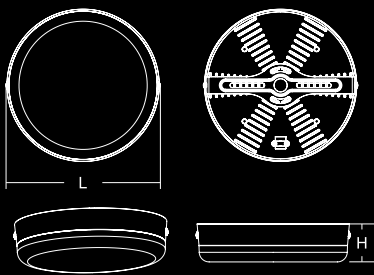

APPLICATIONS:

WIDELY APPLICABLE TO INDOOR LOCATIONS, SUCH AS HOTELS, RESTAURANTS, OFFICES, SHOWROOMS, HOUSES AND SIMILAR PLACES.



PANEL LIGHTS