



SYDNEY

DIE-CASTING ALUMINUM FLOOD
LIGHT IN FASHIONABLE
DESIGN.







SYDNEY

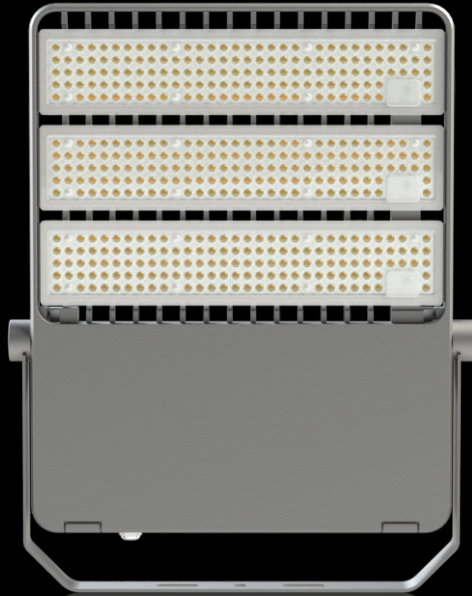

Parameters


| Model | Power | Actual Power | Voltage | Size(mm) |
|--------------|-------|--------------|---------|------------|
| HEC-WLSV-50 | 50W | 50W±10% | 85-265V | 210*310*43 |
| HEC-WLSV-100 | 100W | 100W±10% | 85-265V | 280*438*55 |
| HEC-WLSV-200 | 200W | 200W±10% | 85-265V | 390*438*55 |
| HEC-WLSV-300 | 300W | 300W±10% | 85-265V | 495*436*60 |

Power Factor :0.9PF±10%
 CCT:3000K/4000K/6500K
 Material:Aluminum
 CRI:Ra>70
 SMD Luminous: 180lm/w
 Beam Angle:60°/90°
 IP Rating : IP65

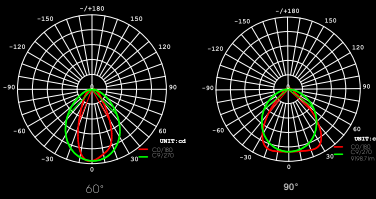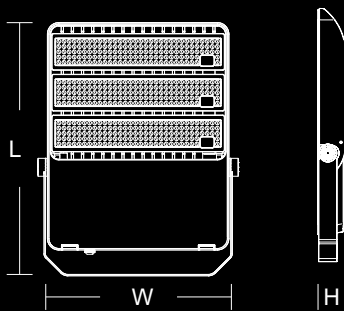

APPLICATIONS:

WIDELY APPLICABLE TO INDOOR AND OUTDOOR LOCATIONS SUCH AS PLAZAS, PARKS, PARKING LOTS, MASTS OR SPORTS CENTERS.

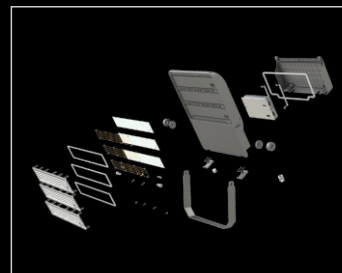

FLOOD LIGHTS