



U AE

MODULE STRUCTURE FOR
PROFESSIONAL STADIUM LIGHTING.



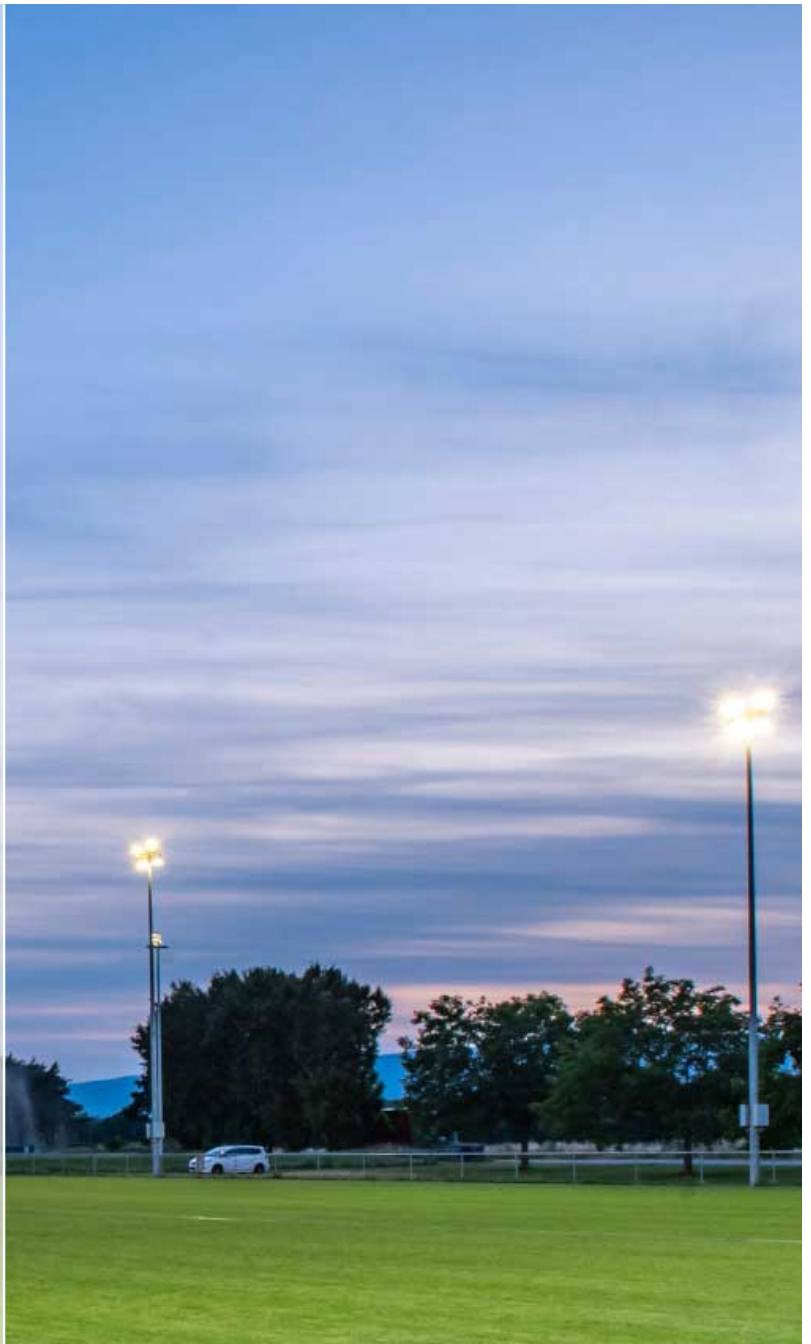


UAE

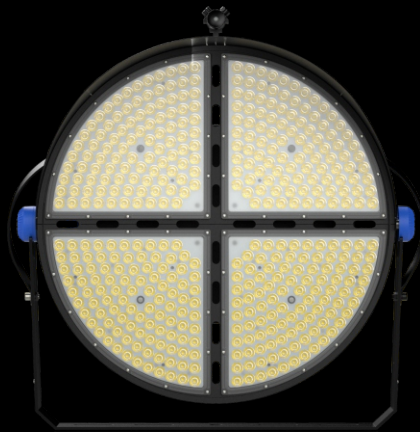

Parameters





Model	Power	Actual Power	Voltage	Size(mm)
HEC-TNNC-400	400W	400W±10%	85-265V	592*509*423
HEC-TNNC-500	500W	500W±10%	85-265V	592*509*423
HEC-TNNC-600	600W	600W±10%	85-265V	592*509*423
HEC-TNNC-800	800W	800W±10%	85-265V	697*649*520
HEC-TNNC-900	900W	900W±10%	85-265V	697*649*520
HEC-TNNC-1000	1000W	1000W±10%	85-265V	697*649*520

Power Factor :0.9PF±10%
 CCT:3000K/4000K/6500K
 Material:Die-cast Aluminum
 CRI:Ra>70
 SMD Luminous: 180lm/w
 Beam Angle: 15°/30°/45°/60°
 IP Rating: IP66

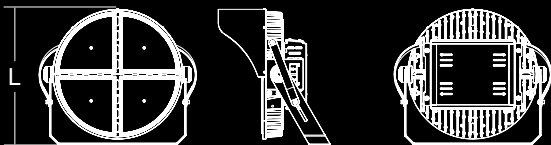

APPLICATIONS:

WIDELY APPLICABLE TO OUTDOOR LOCATIONS SUCH AS SPORTS CENTERS, HIGH MASTS, STADIUMS AND TUNNELS.

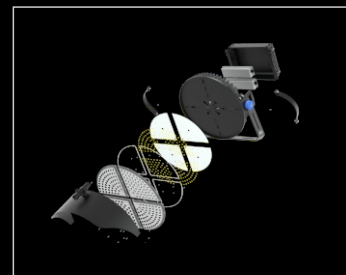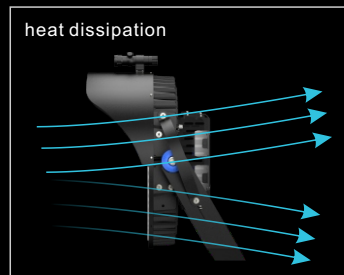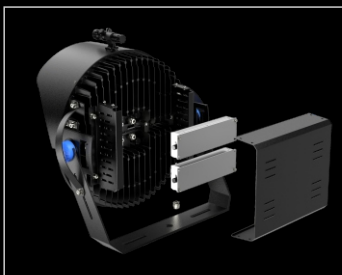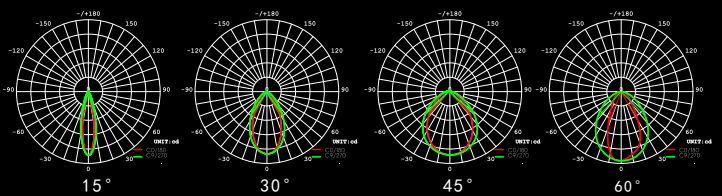

FLOOD LIGHTS