




Applications

Suitable for a variety of indoor lighting scenes, 360° adjustable angle to adapt to lighting.




Details






11GR12L

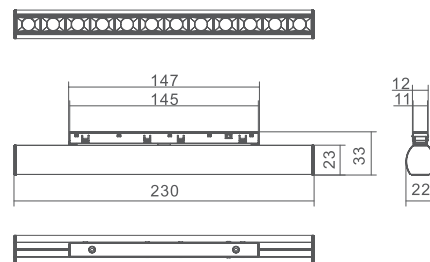

Unit:mm




11GR18L

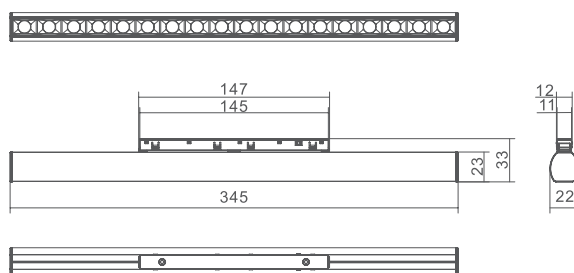

Unit:mm




11GR8L

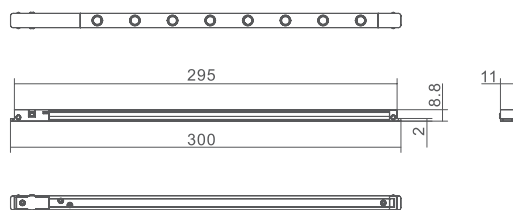

Unit:mm



11GR16L

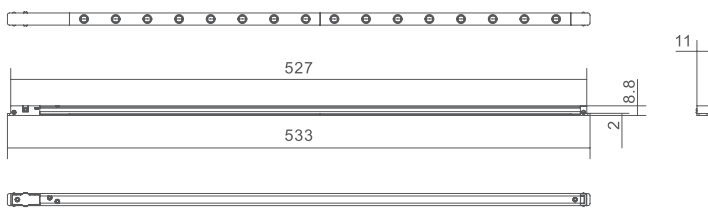

Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
11GR12L	12W	230*11*33	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11GR18L	18W	345*11*33	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11GR8L	6W	300*11*8.8	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11GR16L	12W	533*11*8.8	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted