










Applications

Suitable for a variety of indoor lighting scenes such as living rooms, exhibitions, shops, etc.

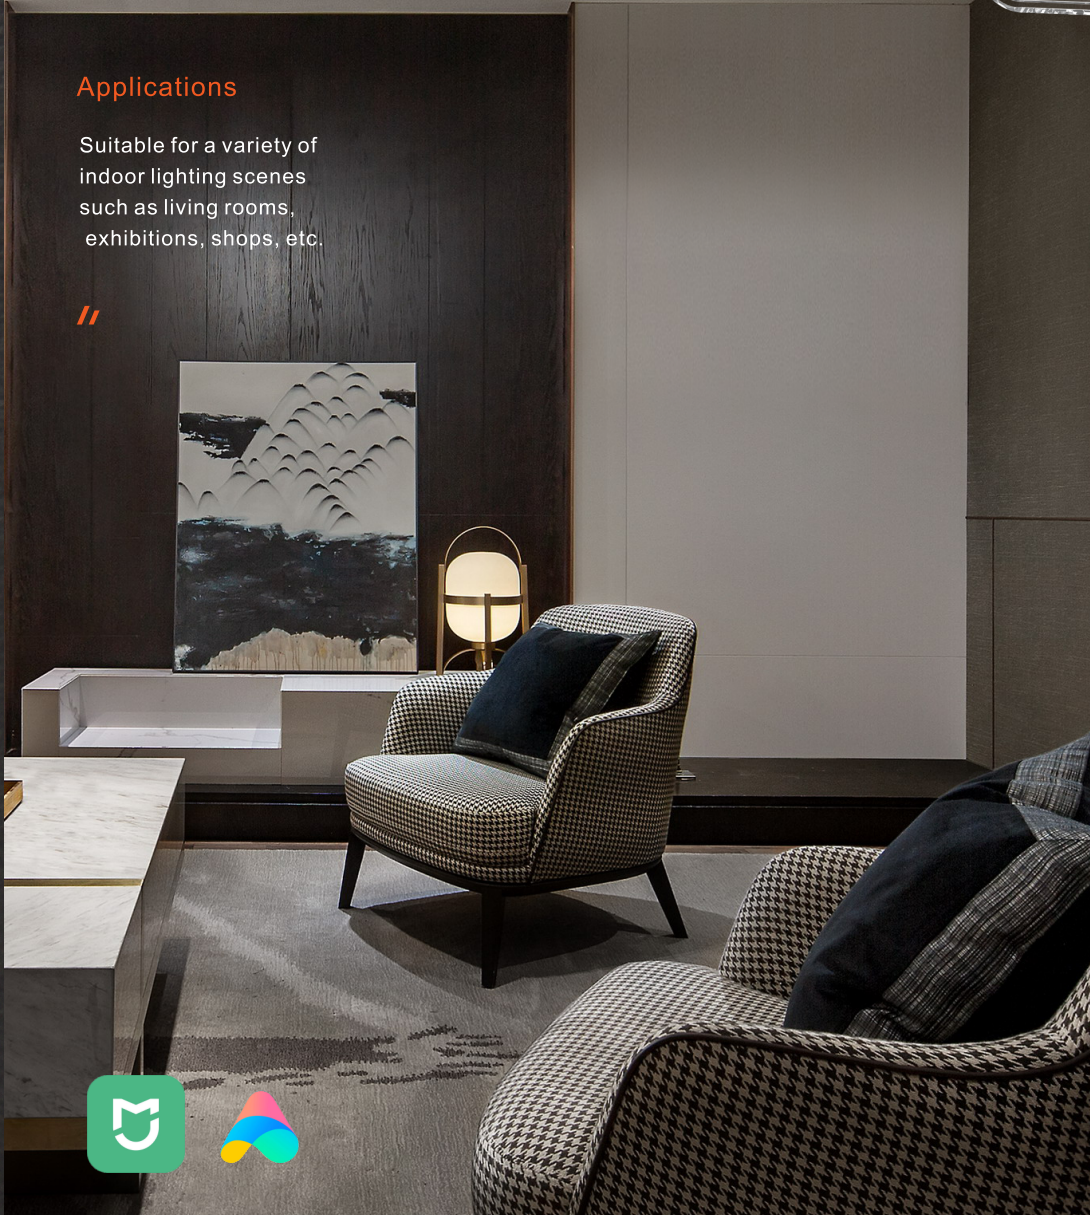

Details

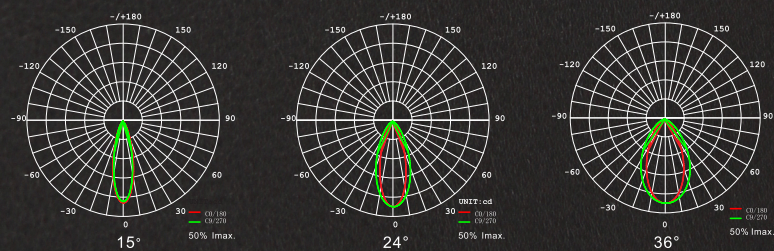

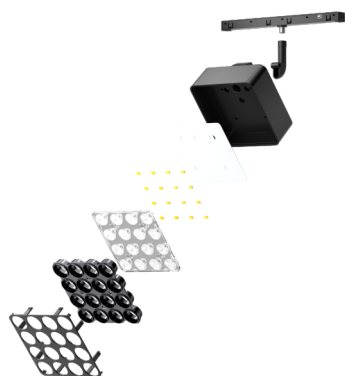


11GRFD16S


Unit:mm



11GRFD24L

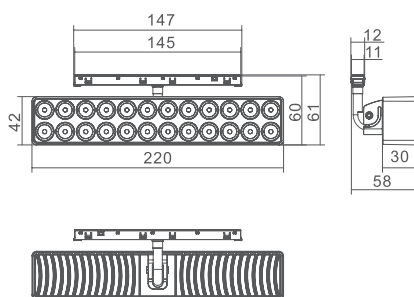


11GRFD16R

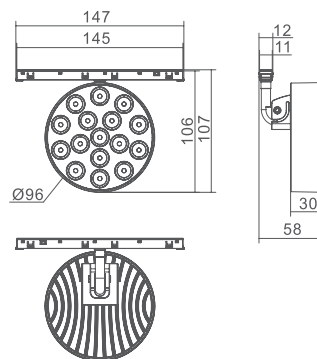


Unit:mm



11GRFD12L

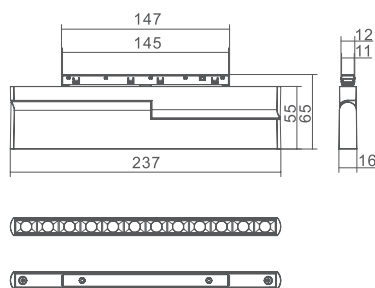

11FLFD16R

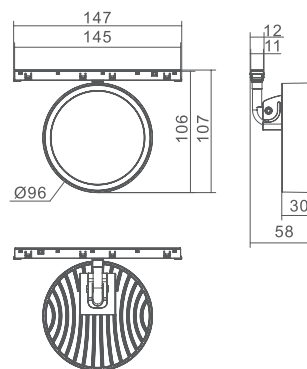

Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
11GRFD16S	16W	76*11*96	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11GRFD24L	24W	220*11*61	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11FLFD16R	16W	Ø96*11*107	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11GRFD12L	12W	237*11*65	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11GRFD16R	16W	Ø96*11*107	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted