







Applications

Suitable for scenes with strong artistic atmosphere or convenient installation requirements, such as cafes, restaurants, corridors, commercial shops, etc.




Details



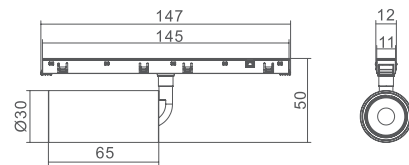


11SPFD5R-A

Unit:mm




11SPFD5R-B

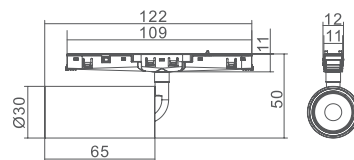


11SPFD5R-C

Unit:mm



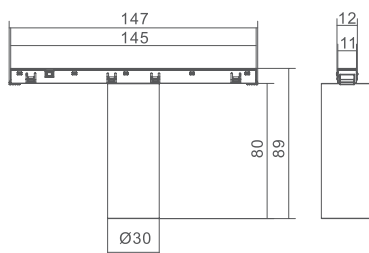


11SP5R-A



11SP5R-B

Unit:mm

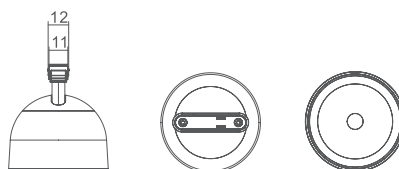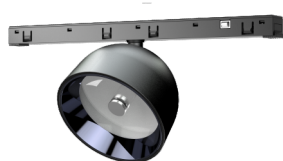

11SPFD1R

Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
11SPFD5R-A	5W	Ø30*11*50	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11SPFD5R-B	5W	Ø50*11*79	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11SPFD5R-C	5W	Ø30*11*50	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11SP5R-A	5W	Ø30*11*89	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11SP5R-B	5W	Ø30*11*91	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
11SPFD1R	5W	Ø62*11*65	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted