







26BFL12L



Unit:mm



26BFL18L

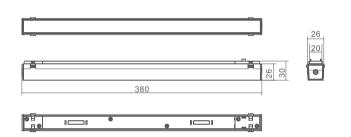


Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	ССТ	Beam Angle	Installation Method
26BFL12L	6W	257*20*30	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
26BFL18L	12W	380*20*30	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted

Features

- o Soft light and high brightness,
- o Easy to install and disassemble,
- o Applicable to indoor lighting scenes,
- o Smaller tracks, modular custom installation.



Exploded

Optics

