





Applications

Suitable for a variety of indoor lighting scenes such as living rooms, exhibitions, shops, etc.




Details

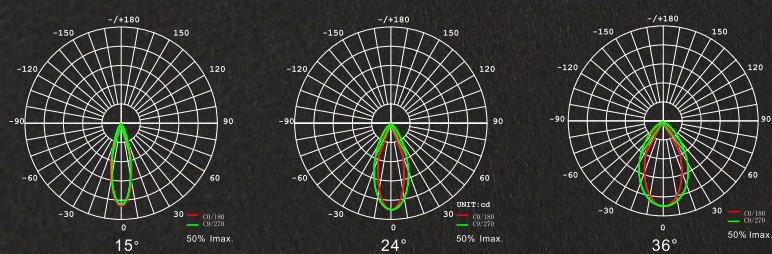





26CGR12L

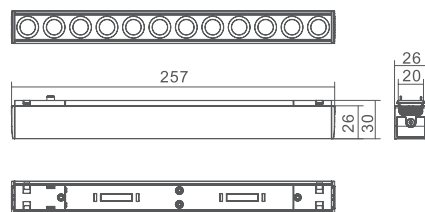


Unit:mm

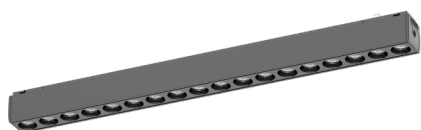


26CGR18L

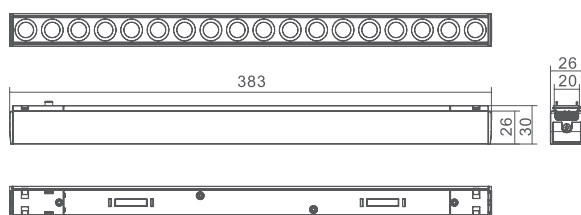

Unit:mm

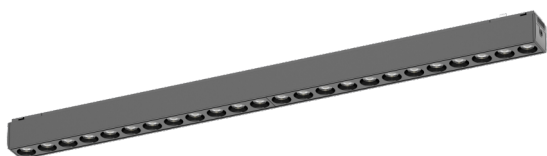


26CGR24L

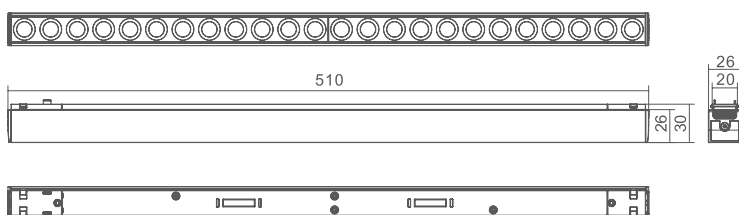

Unit:mm



26CGR6L



Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
26CGR6L	6W	131*20*30	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted/ Tack recessed Mounted
26CGR12L	12W	257*20*30	DC48V	3000K/4000K/6000K	15°/24°/36°	
26CGR18L	18W	383*20*30	DC48V	3000K/4000K/6000K	15°/24°/36°	
26CGR24L	24W	510*20*30	DC48V	3000K/4000K/6000K	15°/24°/36°	