







Details



Details



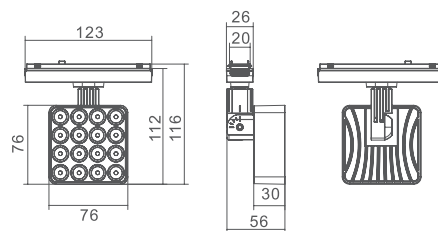


26C(D)GRFD16S

Unit:mm




26C(D)GRFD24L

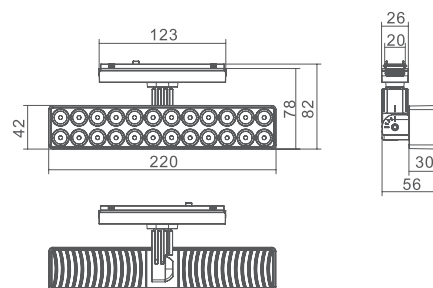

Unit:mm




26C(D)GRFD16R

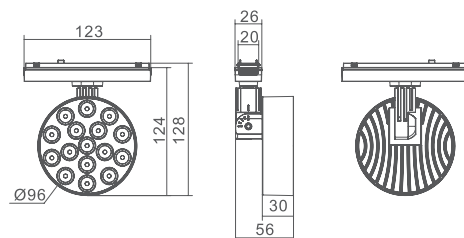

Unit:mm



26C(D)FLFD16R

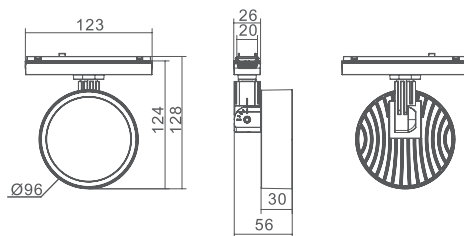

Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
26C(D)GRFD16S	16W	76*20*116	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
26C(D)FLFD16R	16W	Ø96*26*128	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
26C(D)GRFD16R	16W	Ø96*26*128	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
26C(D)GRFD24L	24W	220*20*82	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted