


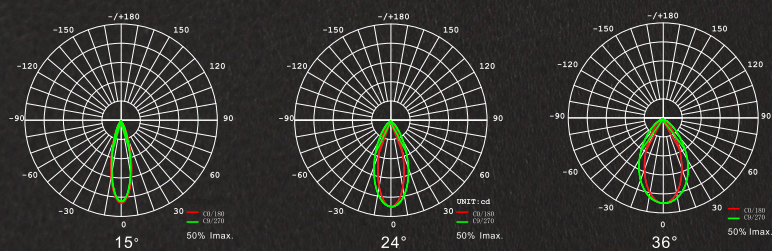


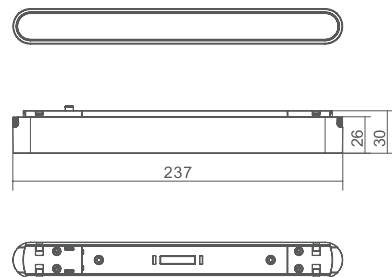



Details



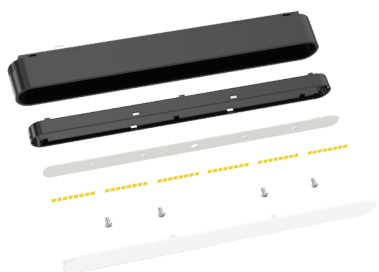


26DFL12R

Unit:mm

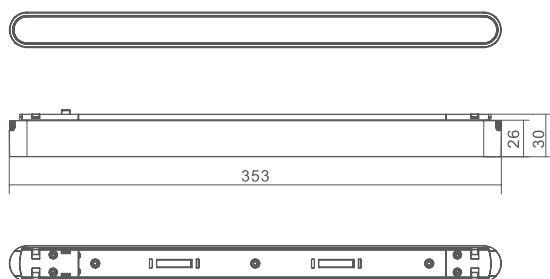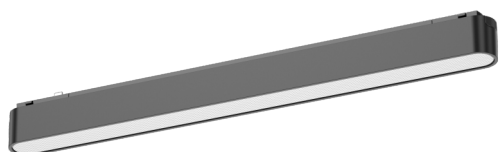

26DFL18R

Unit:mm



26DFL6R

Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
26DFL6R	6W	121*20*30	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted/ Tack recessed Mounted
26DFL12R	12W	237*20*30	DC48V	3000K/4000K/6000K	15°/24°/36°	
26DFL18R	18W	353*20*30	DC48V	3000K/4000K/6000K	15°/24°/36°	