




Applications

Suitable for scenes with strong artistic atmosphere or convenient installation requirements, such as cafes, restaurants, corridors, commercial shops, etc.

CCT DIP Switch




Details

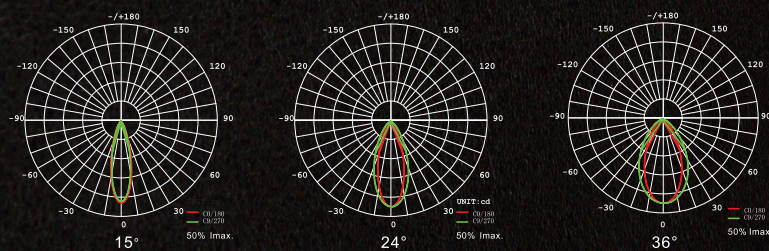





26DR#FL16R

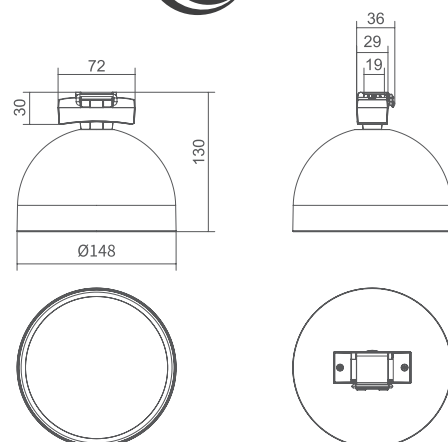


Unit:mm




26DR#FL12R

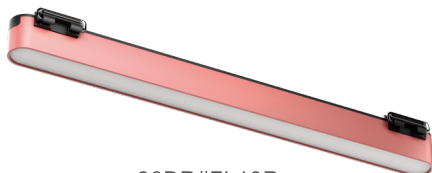

26DR#FL18R

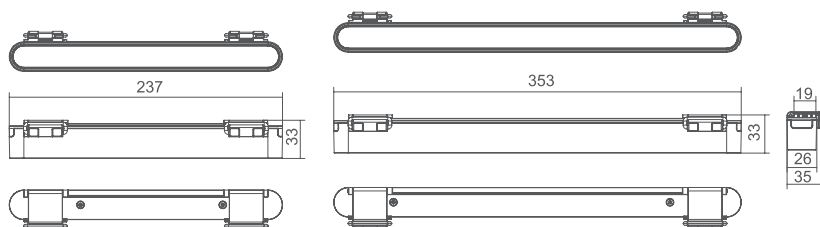


Unit:mm



26DR#FL20L



26DR#FL40L

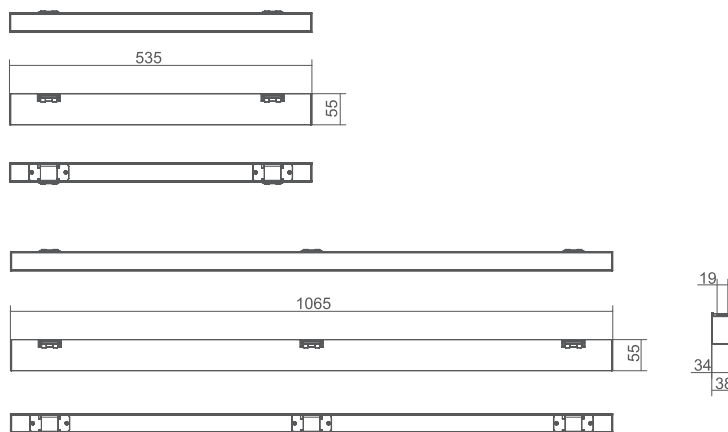

Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
26DR#FL16R	25W	Ø148*19*130	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
26DR#FL12R	12W	237*26*33	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
26DR#FL18R	18W	353*26*33	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
26DR#FL20L	20W	535*34*55	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
26DR#FL40L	40W	1065*34*55	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted