



Applications


Suitable for scenes with strong artistic atmosphere or convenient installation requirements, such as cafes, restaurants, corridors, commercial shops, etc.



Details




26DR#SPFD15R

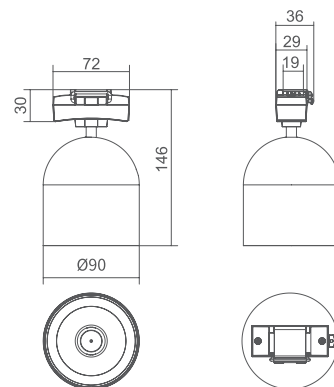

Unit:mm



26DR#SPFD20R



Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
26DR#SPFD16R	15W	Ø90*19*146	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
26DR#SPFD20R	20W	Ø45*19*96	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted

Features

- Easy to install and disassemble,
- Punch conduction, can be powered anywhere,
- Wiring-free design, completely free from the constraints of space,
- The appearance is simple and elegant, with artistic temperament.

