



Applications

Suitable for a variety of indoor lighting scenes such as living rooms, exhibitions, shops, etc.




Details

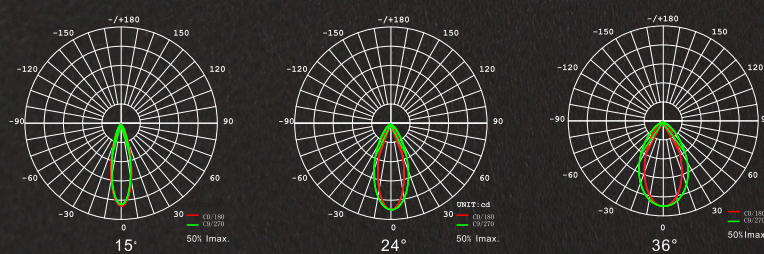

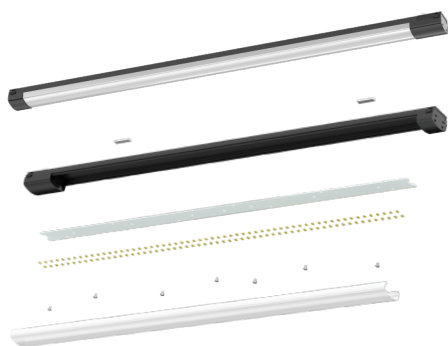

35#1FL24L

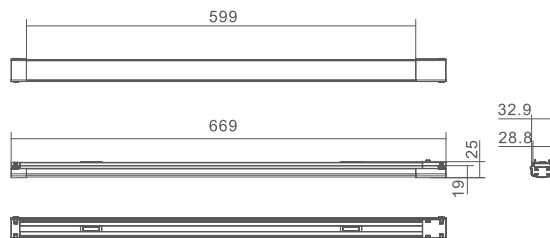

Unit:mm




35#1FL36L




Unit:mm



35#1FL12L

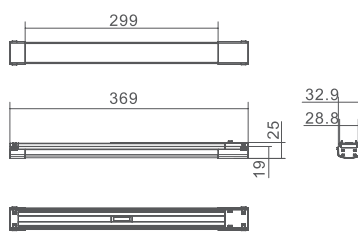


35#2FLFD16R




Unit:mm



35#2FL12R



35#2FL6R



Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
35#1FL12L	12W	369*32.9*25	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
35#1FL24L	24W	669*32.9*25	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
35#1FL36L	36W	969*32.9*25	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
35#2FL6R	6W	141*35.3*36	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
35#2FL12R	12W	274*35.3*36	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
35#2FLFD16R	16W	Ø96*32.9*130	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted