





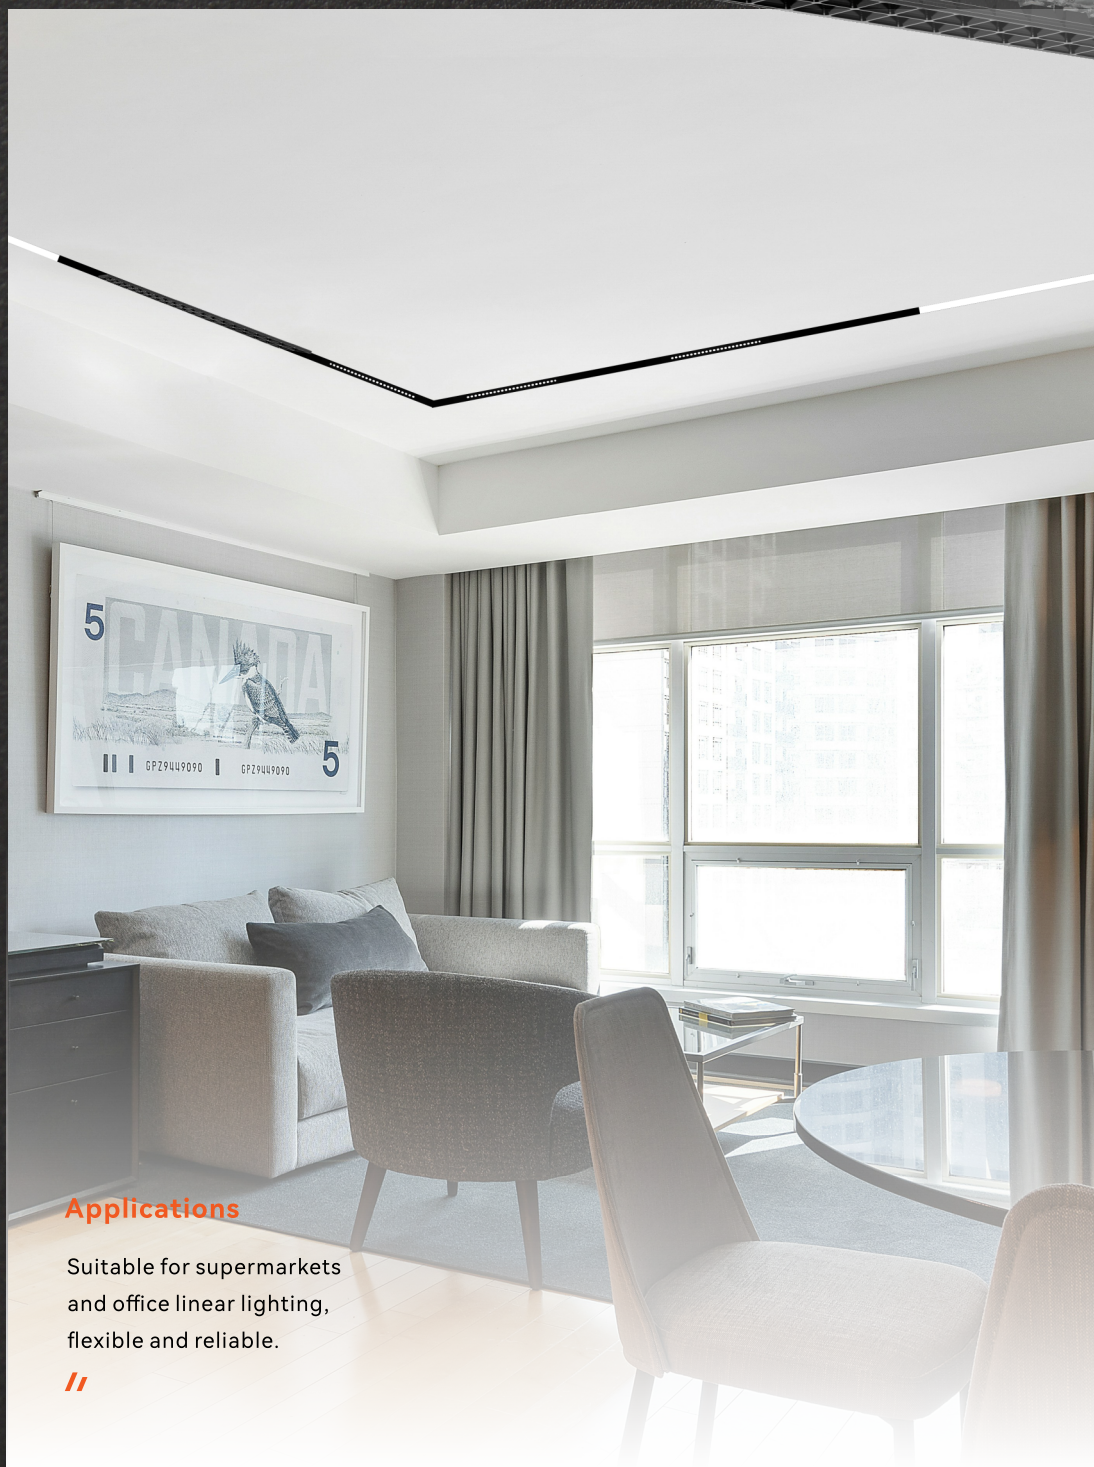




Applications

Suitable for supermarkets
and office linear lighting,
flexible and reliable.

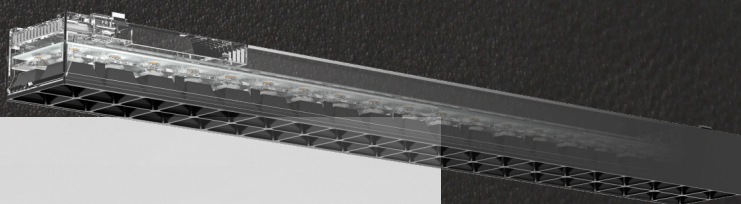


Details







60GR40L

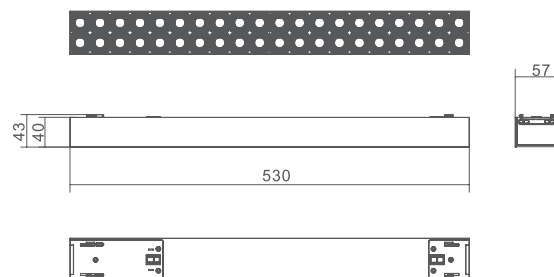


Unit:mm

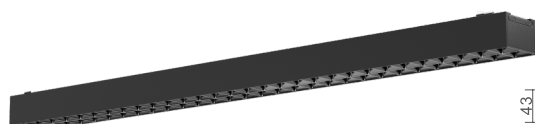


60GR60L

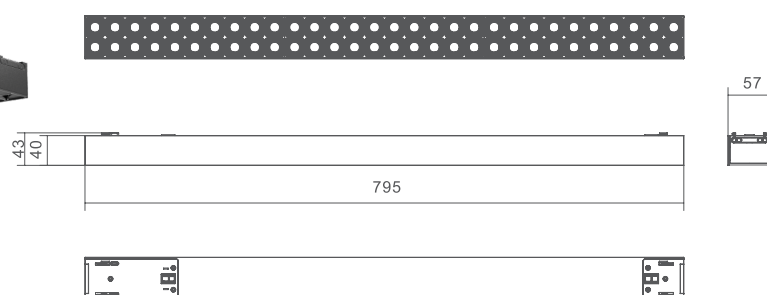

Unit:mm

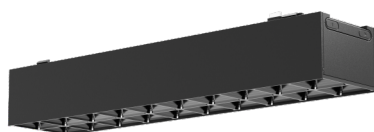

60GR20L

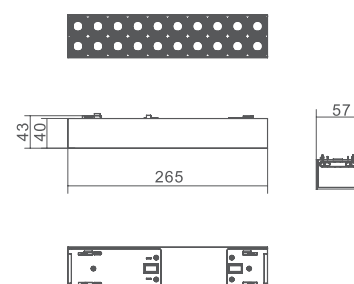

Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
60GR20L	20W	265*57*43	DC48V	3000K/4000K/6000K	15°/24°/36°	Track flush installation
60GR40L	40W	583*57*43	DC48V	3000K/4000K/6000K	15°/24°/36°	Track flush installation
60GR60L	60W	795*57*43	DC48V	3000K/4000K/6000K	15°/24°/36°	Track flush installation