







Applications

Suitable for supermarkets and office linear lighting, flexible and reliable.





Details



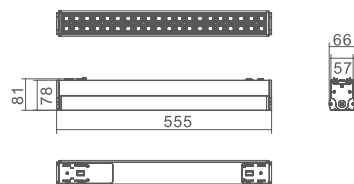

60FDGR40L-A



Unit:mm

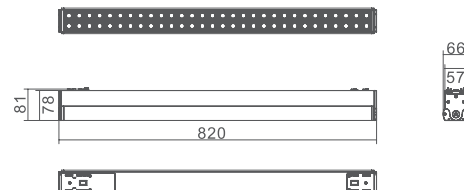

60FDGR20L-A

60FDGR60L-A


Unit:mm

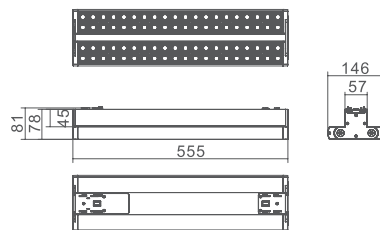

60FDGR40L-B

60FDGR80L-B

Unit:mm

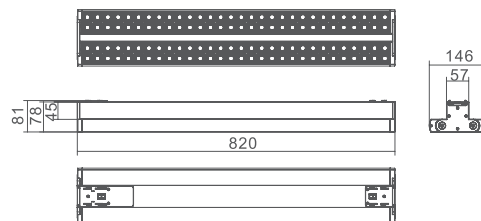

60FDGR120L-B

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
60FDGR40L-A	40W	555*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
60FDGR20L-A	20W	290*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
60FDGR60L-A	60W	820*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
60FDGR40L-B	40W	290*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
60FDGR80L-B	80W	555*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
60FDGR120L-B	120W	820*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted