


Applications


Suitable for supermarkets
and office linear lighting,
flexible and reliable.



Details

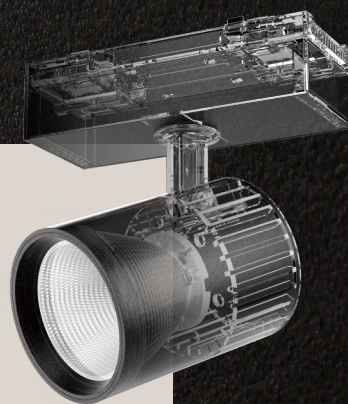



60SPFD25R



Unit:mm



60SPFD35R



Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
60SPFD25R	20W	150*57*Ø80	DC48V	3000K/4000K/6000K	15°/24°/36°	Track Surface Mount
60SPFD35R	30W	150*57*Ø94	DC48V	3000K/4000K/6000K	15°/24°/36°	Track Surface Mount

Optics

