

Applications

Suitable for a variety of indoor lighting scenes such as living rooms, exhibitions, shops, etc.



Details




Color



BLACK




WHITE



Ø41




Ø35



Ø63




Ø55



Ø84



Ø75



Ø105






Ø90

Unit:mm

Parameters

Model	Power	Product Size(mm)	Lamp bead	CUT	CCT	CIR	Beam Angle	Installation Method
DL-SP3R	3W	Ø41*47	OSRAM	Ø35MM	4000K	>90	15°/24°/36°	Surface Mounted
DL-SP5-7R	5-7W	Ø63*48	OSRAM	Ø55MM	4000K	>90	15°/24°/36°	Surface Mounted
DL-SP9-12R	9-12W	Ø84*60	OSRAM	Ø75MM	4000K	>90	15°/24°/36°	Surface Mounted
DL-SP15-18R	15-18W	Ø105*70	OSRAM	Ø90MM	4000K	>90	15°/24°/36°	Surface Mounted

Optics







Color



sand -black



sand- white



High gloss-black




Bright Silver-gold



Chrome-black




Rose-gold



Ø65




Ø55



Ø85




Ø75



Ø85



Ø75



Ø110






Ø95

Unit:mm






Parameters


Model	Power	Product Size(mm)	Lamp bead	CUT	CCT	CIR	Beam Angle	Installation Method
DR-SP8R	8W	Ø65*80	OSRAM	Ø55MM	4000K	>90	15°/24°/36°	Surface Mounted
DR-SP12R	12W	Ø85*85	OSRAM	Ø75MM	4000K	>90	15°/24°/36°	Surface Mounted
DR-SP15R	15W	Ø85*100	OSRAM	Ø75MM	4000K	>90	15°/24°/36°	Surface Mounted
DR-SP20R	20W	Ø110*118	OSRAM	Ø95MM	4000K	>90	15°/24°/36°	Surface Mounted

Optics




RUYING LINE GRILL LIGHT

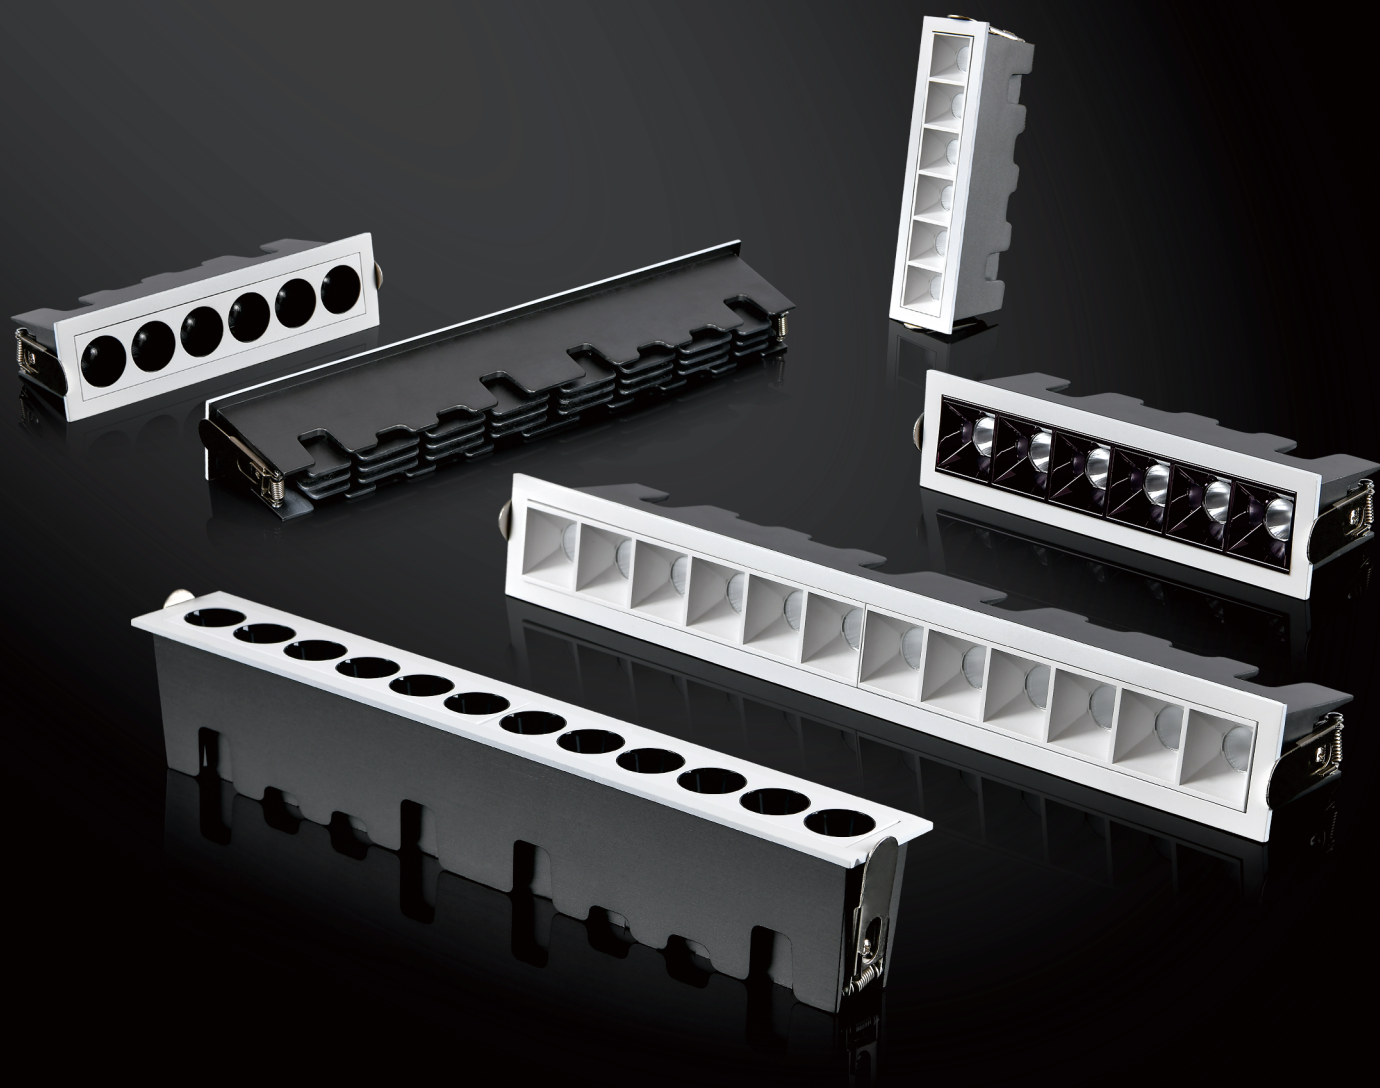





Ø170*40



Ø330*40



Ø170*40



Ø330*40

Unit:mm

Parameters

Model	Power	Product Size(mm)	Lamp bead	CUT	CCT	CIR	Beam Angle	Installation Method
DL-SP12S	12W	175*45.5*60.5	OSRAM	Ø170*40MM	4000K	>90	15°/24°/36°/55°	Surface Mounted
DL-SP24S	24W	334*45.5*60.5	OSRAM	Ø330*40MM	4000K	>90	15°/24°/36°/55°	Surface Mounted
DL-SP12R	12W	175*45.5*60.5	OSRAM	Ø170*40MM	4000K	>90	15°/24°/36°/55°	Surface Mounted
DL-SP24R	24W	334*45.5*60.5	OSRAM	Ø330*40MM	4000K	>90	15°/24°/36°/55°	Surface Mounted
DL-SP12S-2A	12W	175*45.5*60.5	OSRAM	Ø170*40MM	4000K	>90	15°/24°/36°	Surface Mounted
DL-SP24S-2A	24W	334*45.5*60.5	OSRAM	Ø330*40MM	4000K	>90	15°/24°/36°	Surface Mounted
DL-SP12R-2A	12W	175*45.5*60.5	OSRAM	Ø170*40MM	4000K	>90	15°/24°/36°	Surface Mounted
DL-SP24R-2A	24W	334*45.5*60.5	OSRAM	Ø330*40MM	4000K	>90	15°/24°/36°	Surface Mounted









Color



Matt-black sand-white Bright Silver-gold Chrome-black Rose-gold



Unit:mm

Parameters

Model	Power	Product Size(mm)	Lamp bead	CUT	CCT	CIR	Beam Angle	Installation Method
DL-SP8/12-1A	8/W12	108*108*110	OSRAM	Ø55MM	4000K	>90	15°/24°/36°/60°	Surface Mounted
DL-SP8/12-2A	8/W12*2	202*108*110	OSRAM	Ø75MM	4000K	>90	15°/24°/36°/60°	Surface Mounted
DL-SP8/12-3A	8/W12*3	298*108*110	OSRAM	Ø75MM	4000K	>90	15°/24°/36°/60°	Surface Mounted
DL-SP8/12-4A	8/W12*4	202*202*110	OSRAM	Ø95MM	4000K	>90	15°/24°/36°/60°	Surface Mounted

Optics

