



XL-4009

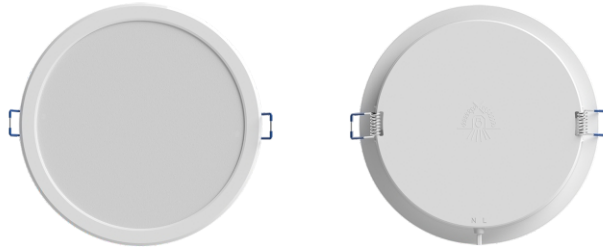


PARAMETERS:

Model	Power	Material	Voltage	Frequency	Size(mm)	Cutout(mm)	Lumen	Efficiency	CRI	CCT	IP	LED Chip
XL-4009	6W	PP+PS	120-240V	50/60Hz	Φ90xH27	Φ70	400Lm	65Lm/w	>80	3000/4000/6500	IP20	SMD2835
XL-4009	10W	PP+PS	120-240V	50/60Hz	Φ120xH27	Φ100	850Lm	85Lm/w	>80	3000/4000/6500	IP20	SMD2835
XL-4009	12W	PP+PS	120-240V	50/60Hz	Φ145xH27	Φ125	1140Lm	95Lm/w	>80	3000/4000/6500	IP20	SMD2835
XL-4009	15W	PP+PS	120-240V	50/60Hz	Φ170xH27	Φ150	1425Lm	95Lm/w	>80	3000/4000/6500	IP20	SMD2835
XL-4009	18W	PP+PS	120-240V	50/60Hz	Φ170xH27	Φ150	1710Lm	95Lm/w	>80	3000/4000/6500	IP20	SMD2835
XL-4009	24W	PP+PS	120-240V	50/60Hz	Φ220xH27	Φ200	2280Lm	95Lm/w	>80	3000/4000/6500	IP20	SMD2835
XL-4009H	10W	PP+PS	120-240V	50/60Hz	Φ145xH38	—	850Lm	85Lm/w	>80	3000/4000/6500	IP20	SMD2835
XL-4009H	12W	PP+PS	120-240V	50/60Hz	Φ145xH38	—	1140Lm	95Lm/w	>80	3000/4000/6500	IP20	SMD2835
XL-4009H	15W	PP+PS	120-240V	50/60Hz	Φ170xH38	—	1425Lm	95Lm/w	>80	3000/4000/6500	IP20	SMD2835
XL-4009H	18W	PP+PS	120-240V	50/60Hz	Φ170xH38	—	1710Lm	95Lm/w	>80	3000/4000/6500	IP20	SMD2835
XL-4009H	24W	PP+PS	120-240V	50/60Hz	Φ220xH38	—	2280Lm	95Lm/w	>80	3000/4000/6500	IP20	SMD2835


DIMENSIONS

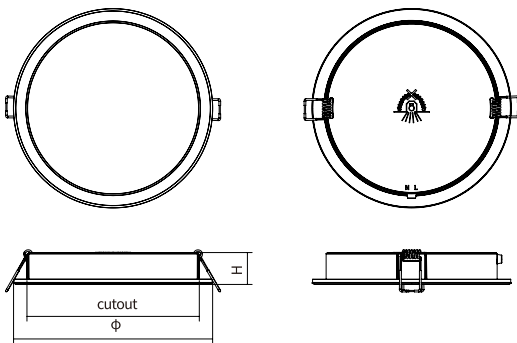

RAYS

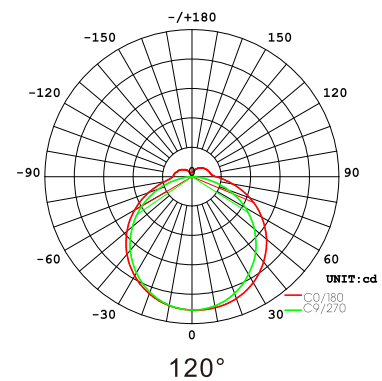

INTERIOR STRUCTURE

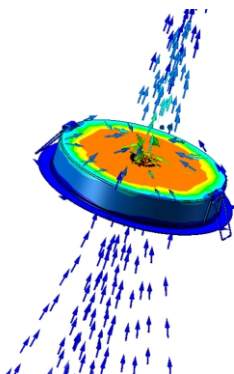

APPLICATIONS

