


XL-C16,C08




PARAMETERS:

Model	Power	Material	Voltage	Frequency	Size(mm)	Lumen	Efficiency	CRI	CCT	IP	LED Chip
XL-C1614	16W	PC+ABS	220-240V	50Hz	Φ325xH100	1440Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C1615	16W	PC+ABS	220-240V	50Hz	Φ325xH100	1440Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C1616	16W	PC+ABS	220-240V	50Hz	Φ325xH100	1440Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C1617	16W	PC+ABS	220-240V	50Hz	Φ325xH100	1440Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C1618	16W	PC+ABS	220-240V	50Hz	Φ325xH100	1440Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C0820	8W	PC+ABS	220-240V	50Hz	Φ270xH90	750Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C0821	8W	PC+ABS	220-240V	50Hz	Φ270xH90	750Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C1614L	16W	PC+ABS	220-240V	50Hz	Φ283xH86	1440Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C1615L	16W	PC+ABS	220-240V	50Hz	Φ283xH86	1440Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C1616L	16W	PC+ABS	220-240V	50Hz	Φ283xH86	1440Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C1617L	16W	PC+ABS	220-240V	50Hz	Φ283xH86	1440Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C1618L	16W	PC+ABS	220-240V	50Hz	Φ283xH86	1440Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C0820L	8W	PC+ABS	220-240V	50Hz	Φ205xH84	750Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835
XL-C0821L	8W	PC+ABS	220-240V	50Hz	Φ205xH84	750Lm	90Lm/w	>80	3000~4000~6500	IP54	SMD2835


DIMENSIONS

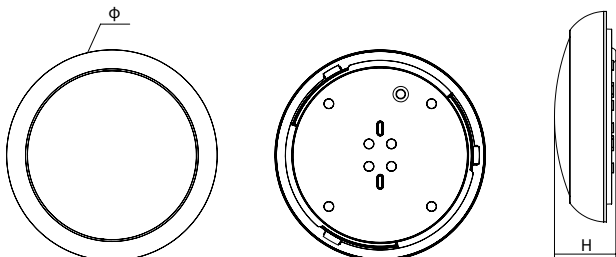

RAYS

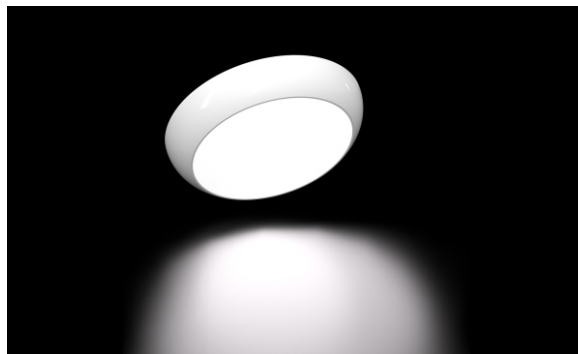

INTERIOR STRUCTURE

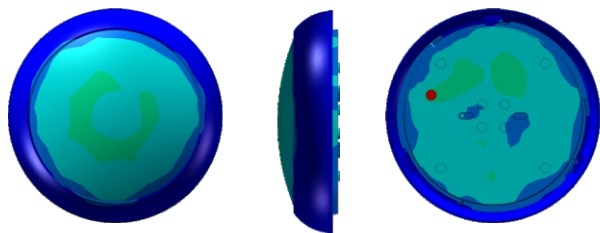

APPLICATIONS

