






Applications

Suitable for a variety of indoor lighting scenes such as living rooms, exhibitions, shops, etc.








5GRFD16S

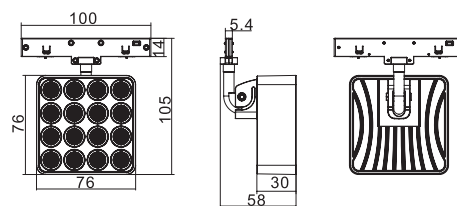


Unit:mm

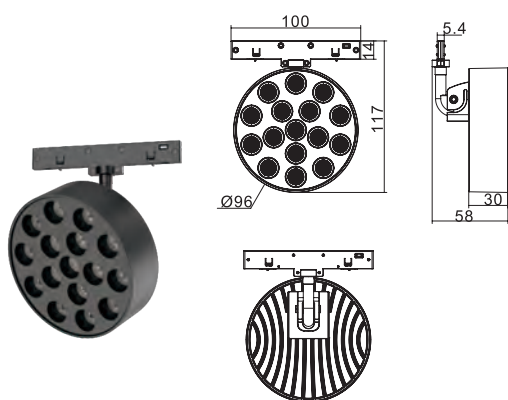


5GRFL16R

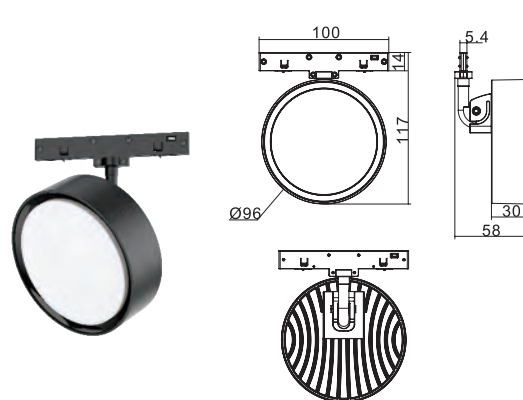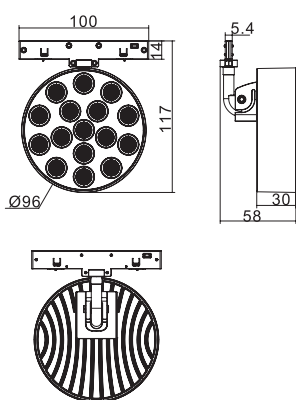


5FLFD16R

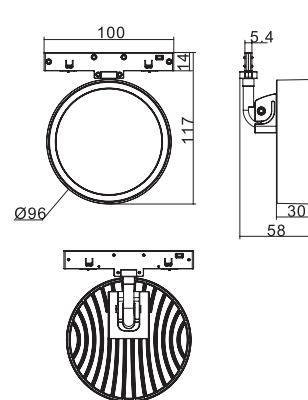


Unit:mm

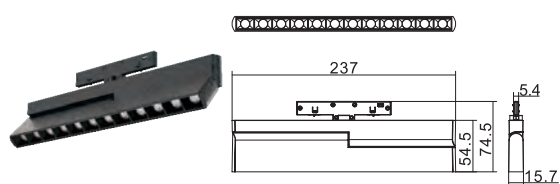

5GRFD12L-A




5GRFD12L-B

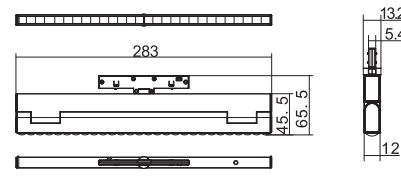

Unit:mm



5FLFD12L

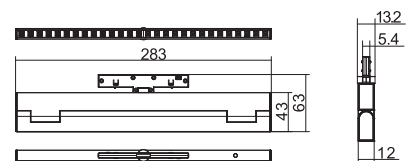

Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
5GRFD16S	12W	100*5.4*105	DC24V	3000K/4000K/6000K	24°/36°	Track installation
5GRFD16R	12W	100*5.4*117	DC24V	3000K/4000K/6000K	24°/36°	Track installation
5FLFD16R	12W	100*5.4*117	DC24V	3000K/4000K/6000K	24°/36°	Track installation
5GRFD12L-A	12W	237*15.7*74.5	DC24V	3000K/4000K/6000K	24°/36°	Track installation
5GRFD12L-B	12W	283*12*65.5	DC24V	3000K/4000K/6000K	50°	Track installation
5FLFD12L	12W	283*12*63	DC24V	3000K/4000K/6000K	40°	Track installation