








Applications

Suitable for a variety of indoor lighting scenes such as living rooms, exhibitions, shops, etc.






5SPFD5R-A

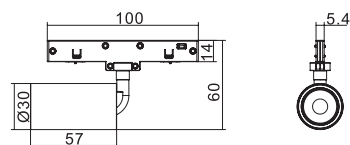


Unit:mm



5SPFD10R-A




5SPFD15R-A

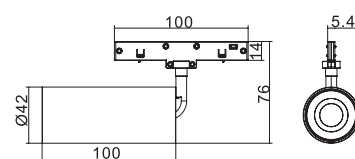


Unit:mm



5SP5R





5SPFD5R-C




Unit:mm



5SP20L

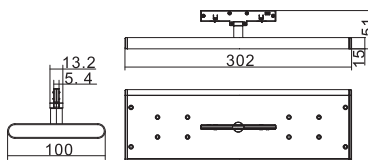


5SPFD5R-B




Unit:mm



5SPFD6R



5SPFD10R-B



Unit:mm

Parameters

Voltage: DC24V

CCT: 3000K/4000K/6000K

Installation Method: Track installation

Model	5SPFD5R-A	5SPFD10R-A	5SPFD15R-A	5SP5R	5SPFD5R-C	5SP20L	5SPFD5R-B	5SPFD6R	5SPFD10R-B
Power	5W	10W	15W	5W	5W	20W	5W	6W	10W
Product Size (mm)	Ø30*5.4*60	Ø35*5.4*73	Ø42*5.4*76	Ø30*5.4*100	Ø50*5.4*88	302*100*51	Ø62*5.4*75	Ø75*5.4*36	78*77*78
Beam Angle	24°/36°	24°/36°	24°/36°	24°/36°	24°/36°	70°	24°/36°	Asymmetric 20°/24°/36°	24°/36°