






Applications

Suitable for a variety of indoor lighting scenes such as living rooms, exhibitions, shops, etc.






Details





60FL40L




Unit:mm

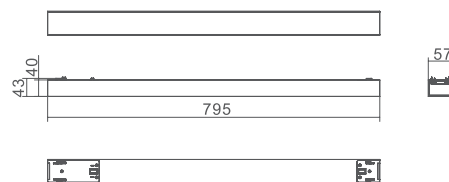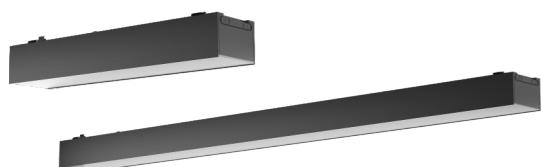

60FL20L

60FL60L




Unit:mm

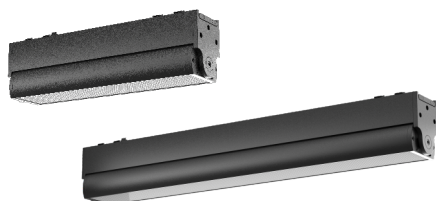

60FDFL20L

60FDFL40L

Unit:mm

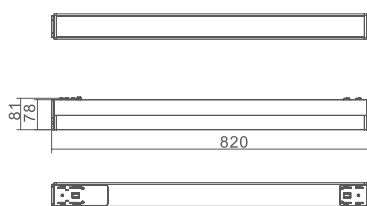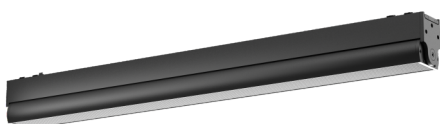

60FDFL60L

60FDFL30R

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
60FL20L	20W	265*57*43	DC48V	3000K/4000K/6000K	15°/24°/36°	Track flush installation
60FL40L	40W	530*57*43	DC48V	3000K/4000K/6000K	15°/24°/36°	Track flush installation
60FL60L	60W	795*57*43	DC48V	3000K/4000K/6000K	15°/24°/36°	Track flush installation
60FDFL20L	20W	290*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Track flush installation
60FDFL40L	40W	555*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Track flush installation
60FDFL60L	60W	820*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Track flush installation
60FDFL30R	30W	150*57*Ø148	DC48V	3000K/4000K/6000K	15°/24°/36°	Track Surface Mount