







Applications

Suitable for showcases, cabinets, jewelry and art displays and other places that require key lighting.






Details



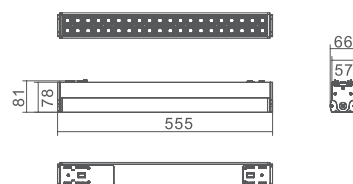


60FDGR40L-A

Unit:mm

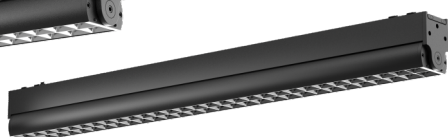


60FDGR20L-A

60FDGR60L-A

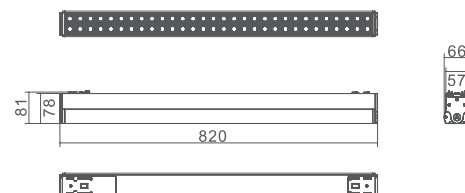


Unit:mm



60FDGR40L-B


60FDGR80L-B

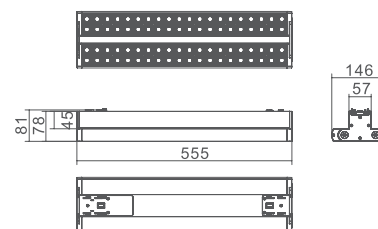

Unit:mm



60FDGR120L-B

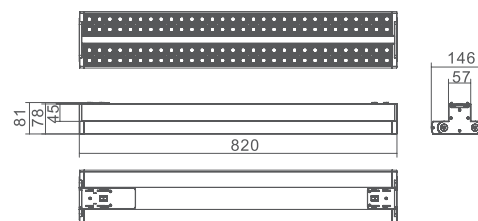

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
60FDGR40L-A	40W	290*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
60FDGR20L-A	20W	555*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
60FDGR60L-A	60W	820*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
60FDGR40L-B	40W	290*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
60FDGR80L-B	80W	555*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted
60FDGR120L-B	120W	820*57*81	DC48V	3000K/4000K/6000K	15°/24°/36°	Surface Mounted