








Applications

It is widely used in various indoor lighting scenes such as living rooms, corridors, bedrooms, brand retail stores, art galleries, cafes, etc.



Details







H18GR20R


Unit:mm





H18GR10R



Unit:mm

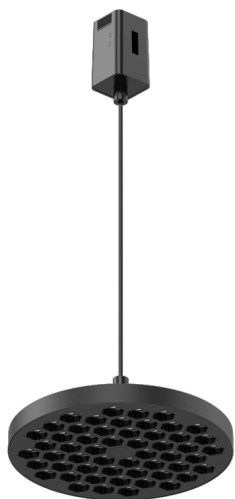

H18GRSU20R

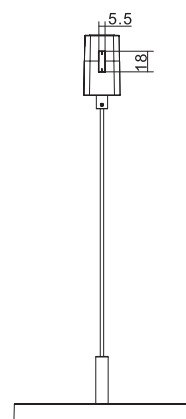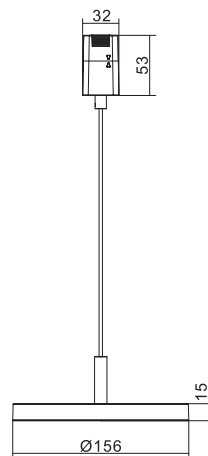

Unit:mm

Parameters

Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
H18GR10R	10W	Ø122*32*68.5	DC24V	3000K/4000K/6000K	60°	Track installation
H18GR20R	20W	Ø156*32*68.5	DC24V	3000K/4000K/6000K	60°	Track installation
H18GRSU20R	20W	Ø156*32*H(any length)	DC24V	3000K/4000K/6000K	60°	Track installation