

场景应用

适用于消防通道及各类安全出口，如走廊，过道，指引区等。



规格书




产品详情



型号	FCZM-ZR-A	FCZM-ZR-B	FCZM-ZR-C
产品尺寸	L355*H270*Wa170mm	L355*H65*Wa165mm	L355*H65*Wa165mm
功率因素	>0.95		
防护等级	IP66		
灯体颜色	>80		
防腐等级	WF1-WF2		
防爆标志	Ex nr IIC T6 Gc; Ex tc IIC T80°C Dc		
多种款式	单通款/双通款/双头款/吊链款		
包装尺寸	820*370*300MM	620*378*183MM	410*335*220MM
净重 (KG)	17KG	16.7KG	12KG
装箱数量	6个	8个	5个
20GP	1846个	5223个	4633个
40GP	3823个	10819个	9597个
40HQ	4483个	12684个	11252个

防爆应急灯




黄色



产品特点:

- 1: ADC12压铸铝外壳，高效散热，高节能.
- 2: LED密封组件，IP66防水、防尘、防爆.
- 3: 外观材质有灰色/黄色.
- 4: 可选配多种款式，如吊链款，单头款，双头款等。

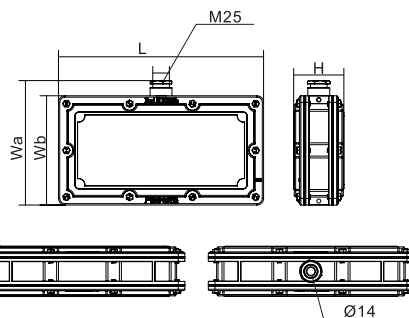

产品线条图

多种款式



双头款-ZR-A



单面款-ZR-B



双面款-ZR-C

EEX NR IIC T6 GC; EX TC IIC T80°C DC