

场景应用

适用于加油站、化工厂、
石油工厂、海上作业等
危险照明场所。



规格书





产品详情




型号	FCZM-YGDB24	FCZM-YGDB36	FCZM-YGDB50	FCZM-YGDB60	FCZM-YGDB70	FCZM-YGDB80
功率	24W	36W	50W	60W	70W	80W
净尺寸	65*6.5*9.6cm	65*6.5*9.6cm	115*6.5*9.6cm	115*6.5*9.6cm	115*6.5*9.6cm	115*6.5*9.6cm
孔距	45.3cm	45.3cm	45.3cm	95.3cm	95.3cm	95.3cm
色温	3200-6500K					
功率因素	>0.95					
防护等级	IP66					
显色指数	>80					
流明	130LM/W					
防腐等级	WF1-WF2					
电压	85-265V 50HZ					
适用电缆规格	8~20mm					
防爆标志	Ex tb IIIC T80°C Db					

防爆荧光灯-B

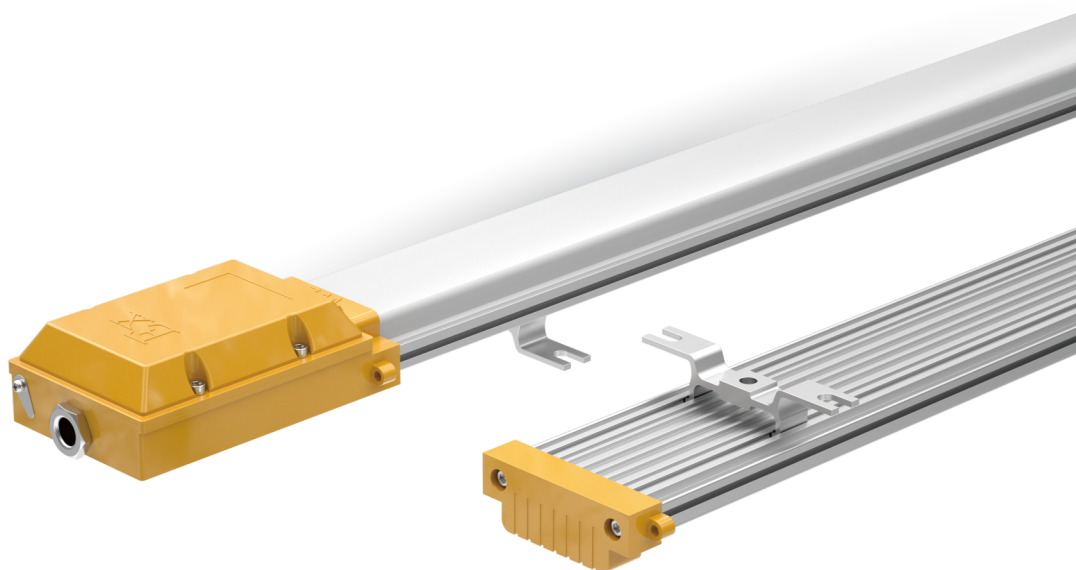


产品特点:

- 1: ADC12压铸铝外壳，高效散热，高节能.
- 2: LED密封组件，IP66防水、防尘、防爆.
- 3: 可选配吊链款及吸顶款
- 4: 长度可选配650MM或1200mm款式.



产品线条图

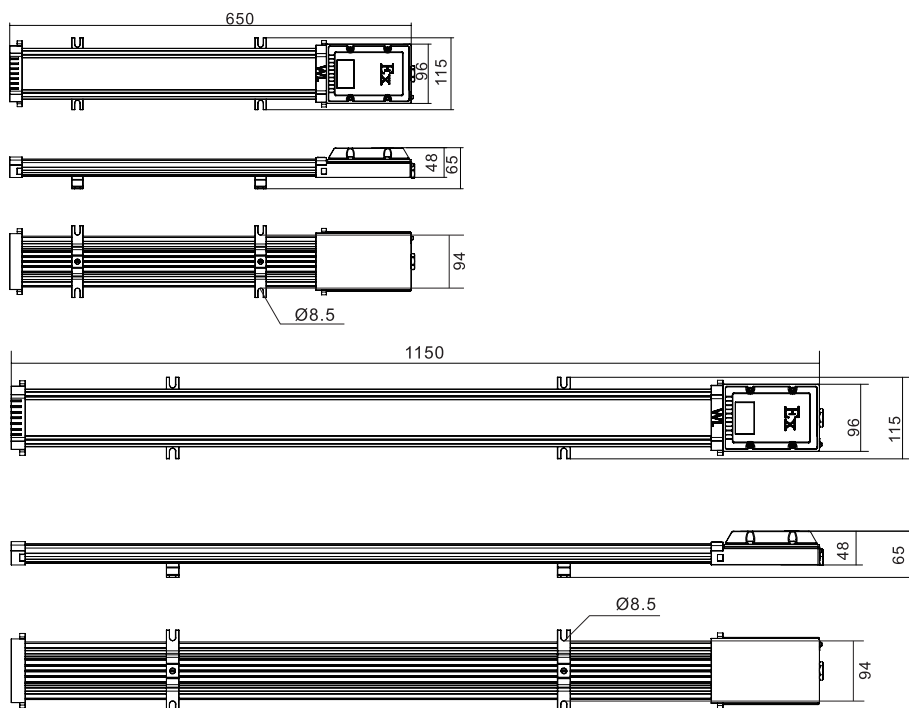

EX TB IIC T80°C DB