


EXPLODED




2 LENGTH OPTIONS: 1200MM/600MM

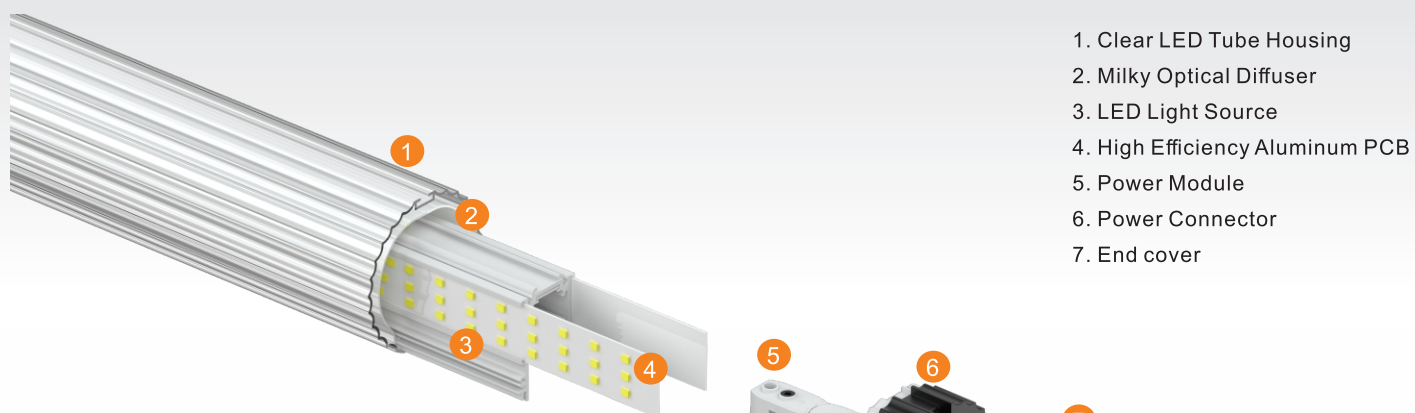





D68x600MM



D68x1200MM

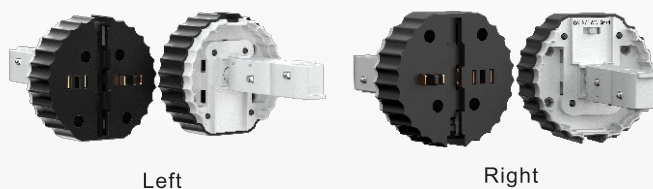


SPLICING PROCESS

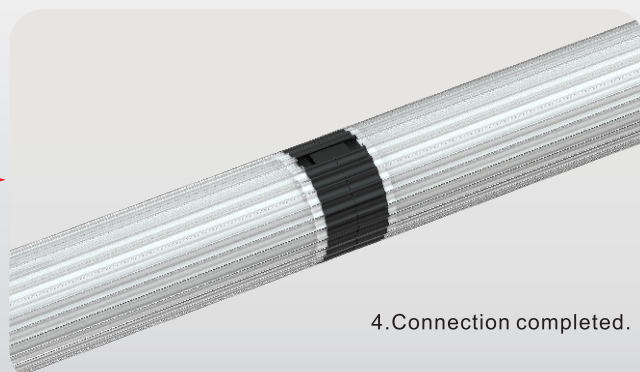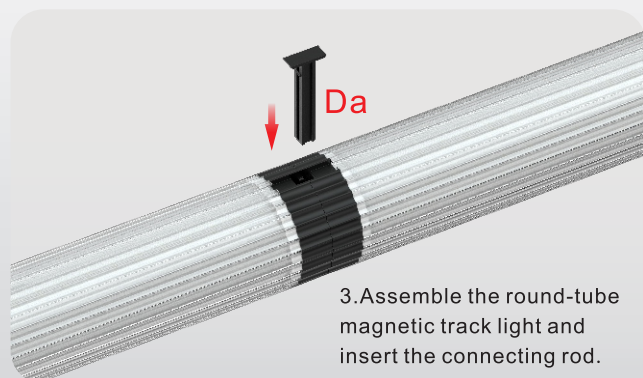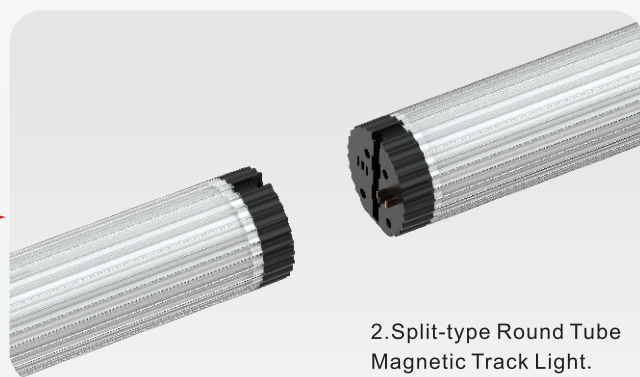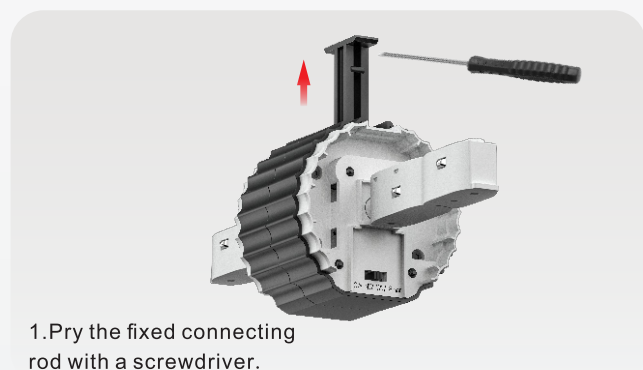



LIGHT FIXTURE SPLICING



MODULE SPLICING CONNECTOR

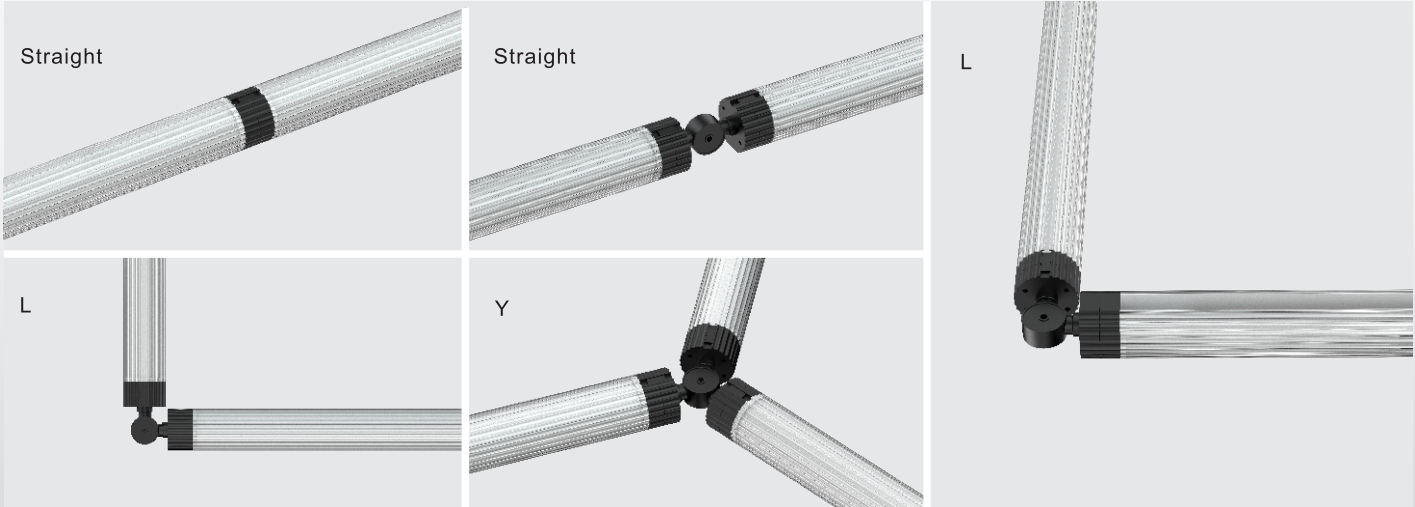

DIP SWITCH ADJUSTMENT DESIGN

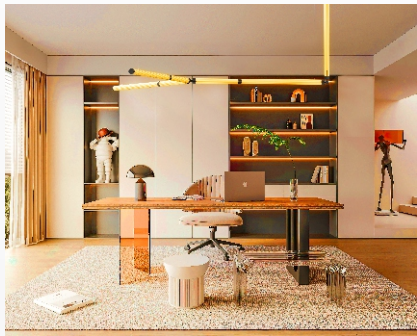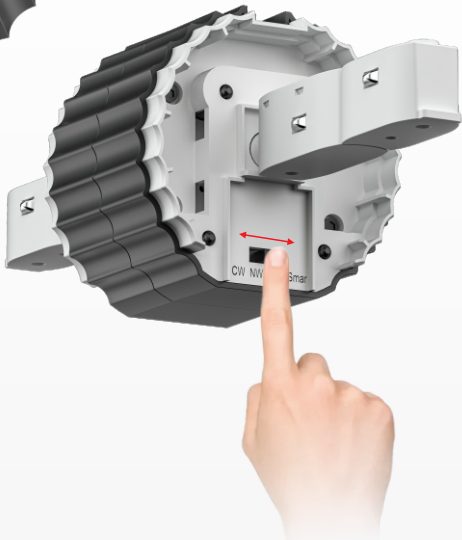

WW

Warm White
Glowing track monochromatic
temperature of 2700K-3200K



NW

Neutral White
Glowing track monochromatic
temperature of 3800K - 4500K



CW

Cool White
Glowing track monochromatic
temperature of 5000K-6500K

SMART

SMART
Conductive Power Track
Synchronous control of lamps with
glowing track dimming and color
temperature adjustment

RH68-20
CIRCULAR GLOWING TRACK
SYSTEM 4 DIP SWITCH
ADJUSTMENT DESIGN

APPLICATIONS



Suitable for modern light-luxury commercial and residential spaces, it can be used in offices, hotels, supermarkets, dining clubs, duplex lofts, living rooms, exhibition halls and other scenarios. It balances practical lighting and spatial aesthetic expression, and fits a variety of interior design styles such as minimalist, industrial and modern light-luxury.

TUBULAR LIGHT APPLICATIONS





ROTATABLE GRILLE LIGHT APPLICATIONS





FOLDABLE GRILLE LIGHT APPLICATIONS



PRODUCTS

RH68-20 Series

Decorative Magnetic Tracking System

Compatible with 20mm series
track magnetic lights

